
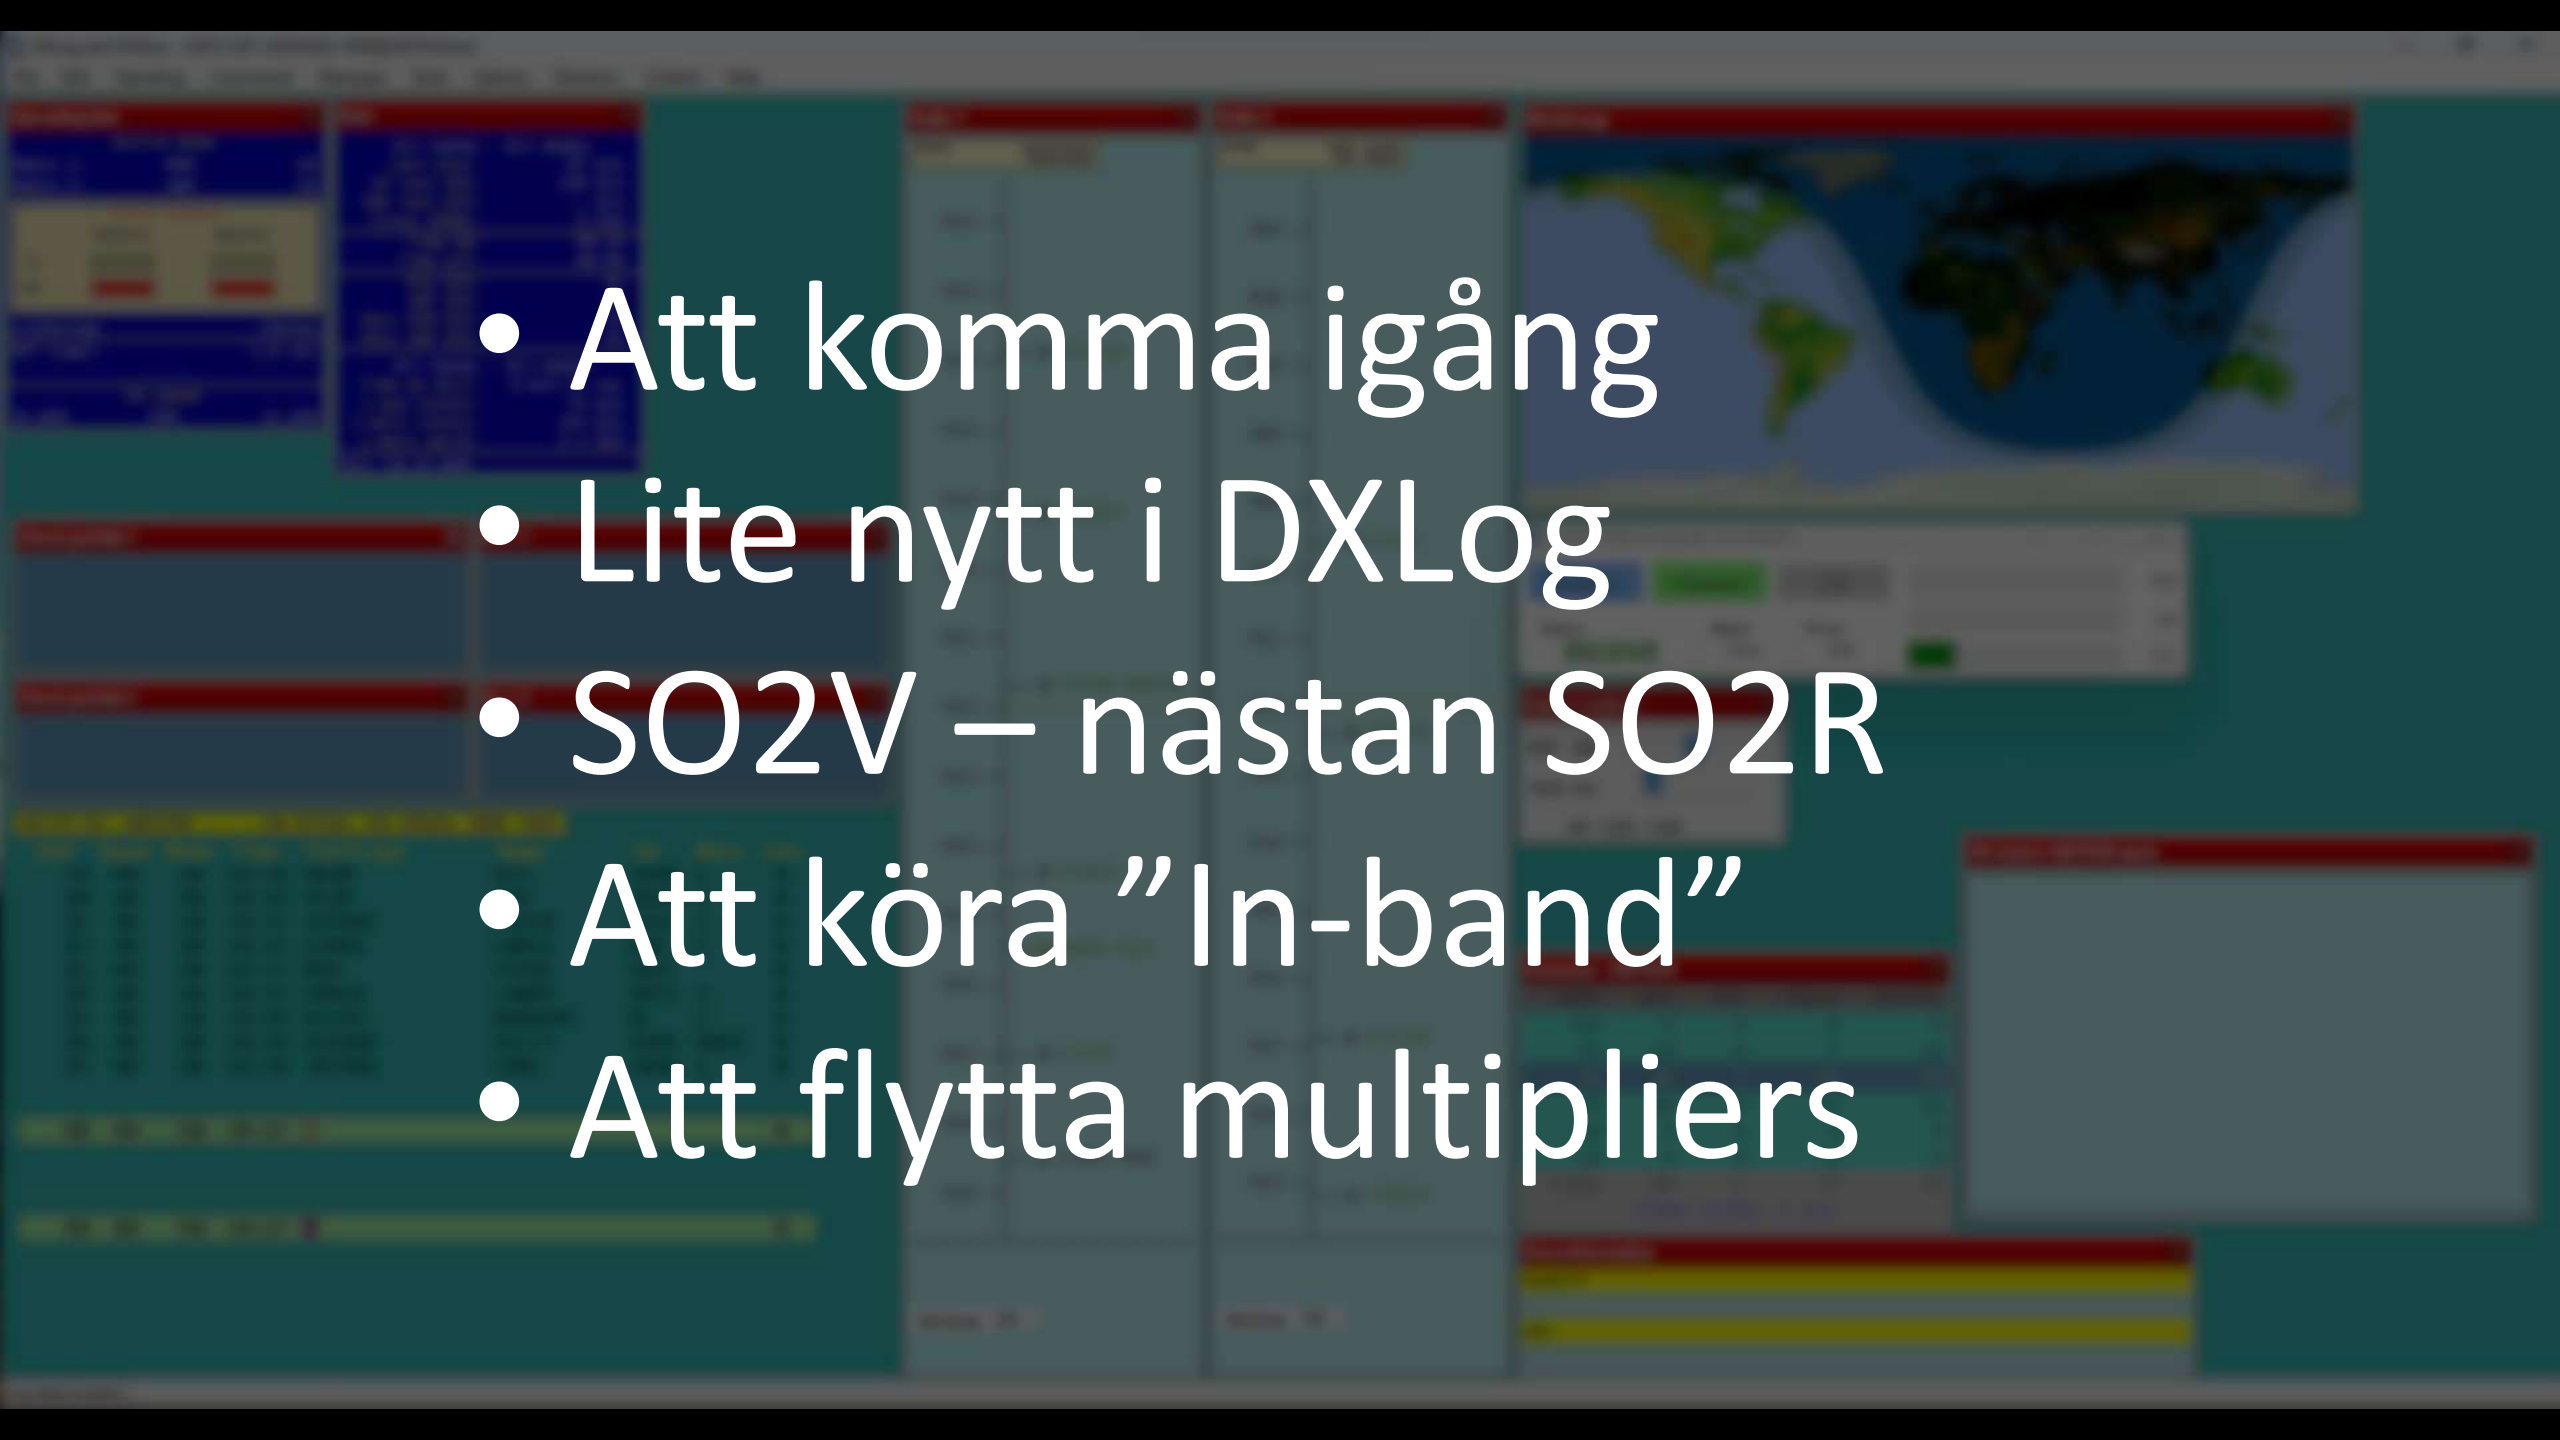


Lite mer avancerad contest med DXLog

- 
- Att komma igång
 - Lite nytt i DXLog
 - SO2V – nästan SO2R
 - Att köra "In-band"
 - Att flytta multipliers

Att komma igång

Skapa en logg

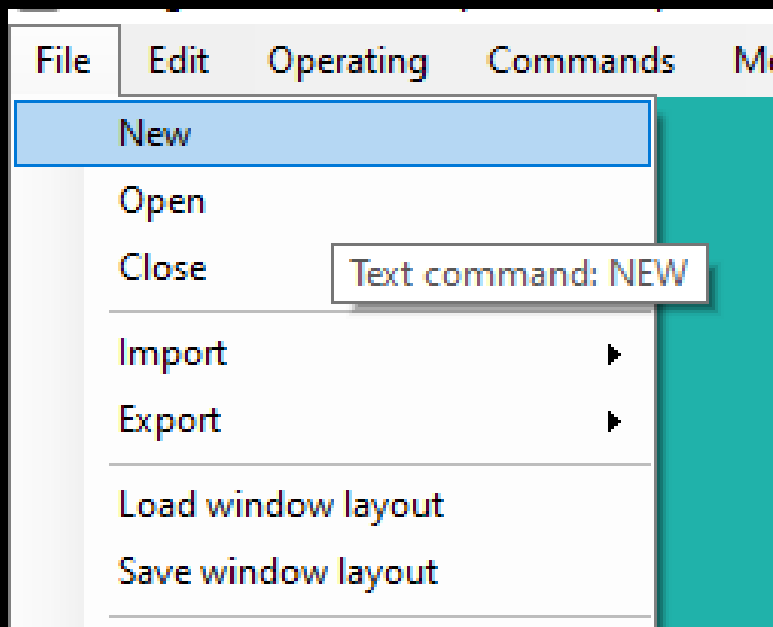

9	160	CW	13:41	EX4nn	599	599	
10	160	CW	13:41	SE5E	599	599	INGO
11	160	CW	13:42	NEW	599	599	

Contest configuration

Station

Callsign Grid square Exchange

DXCC prefix CQ/WAZ zone ITU zone State/Province/Other

Contact

Name

Address

Address

City State Zip

Country Email

Club

☒ Request certificate

Contest

Contest

Category

Station Mode




Overlay Operator name

Class Power

Operators


OK Cancel

Koppla in radion

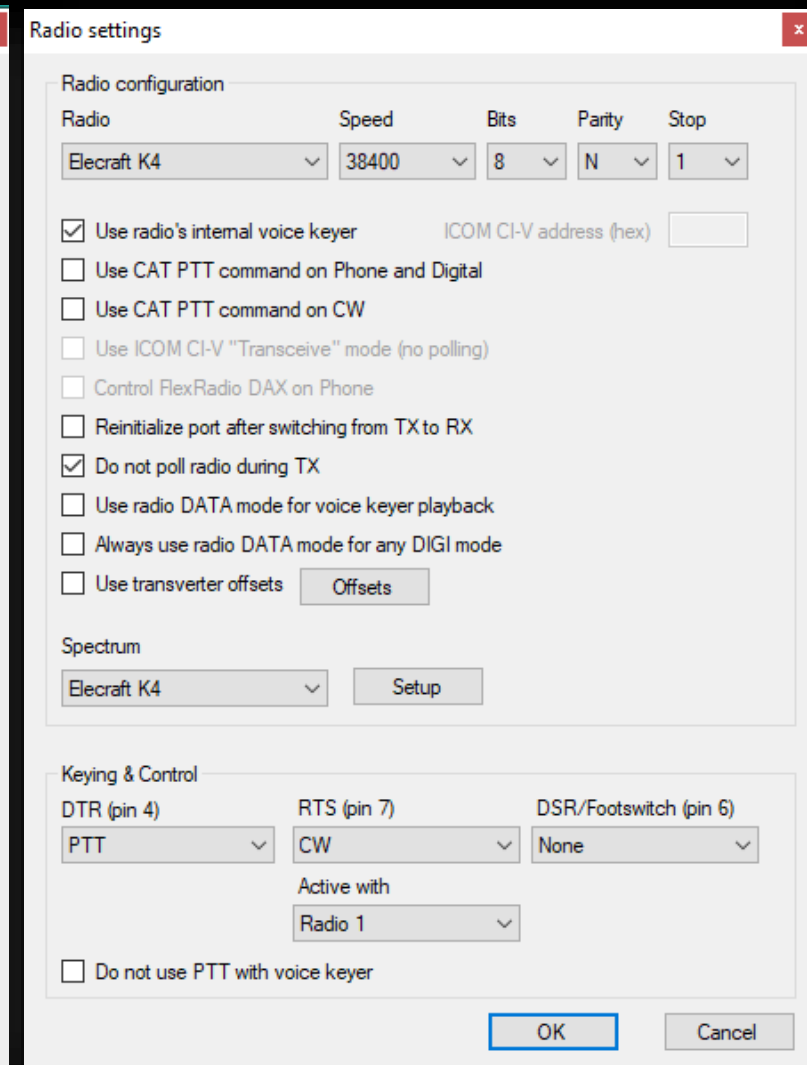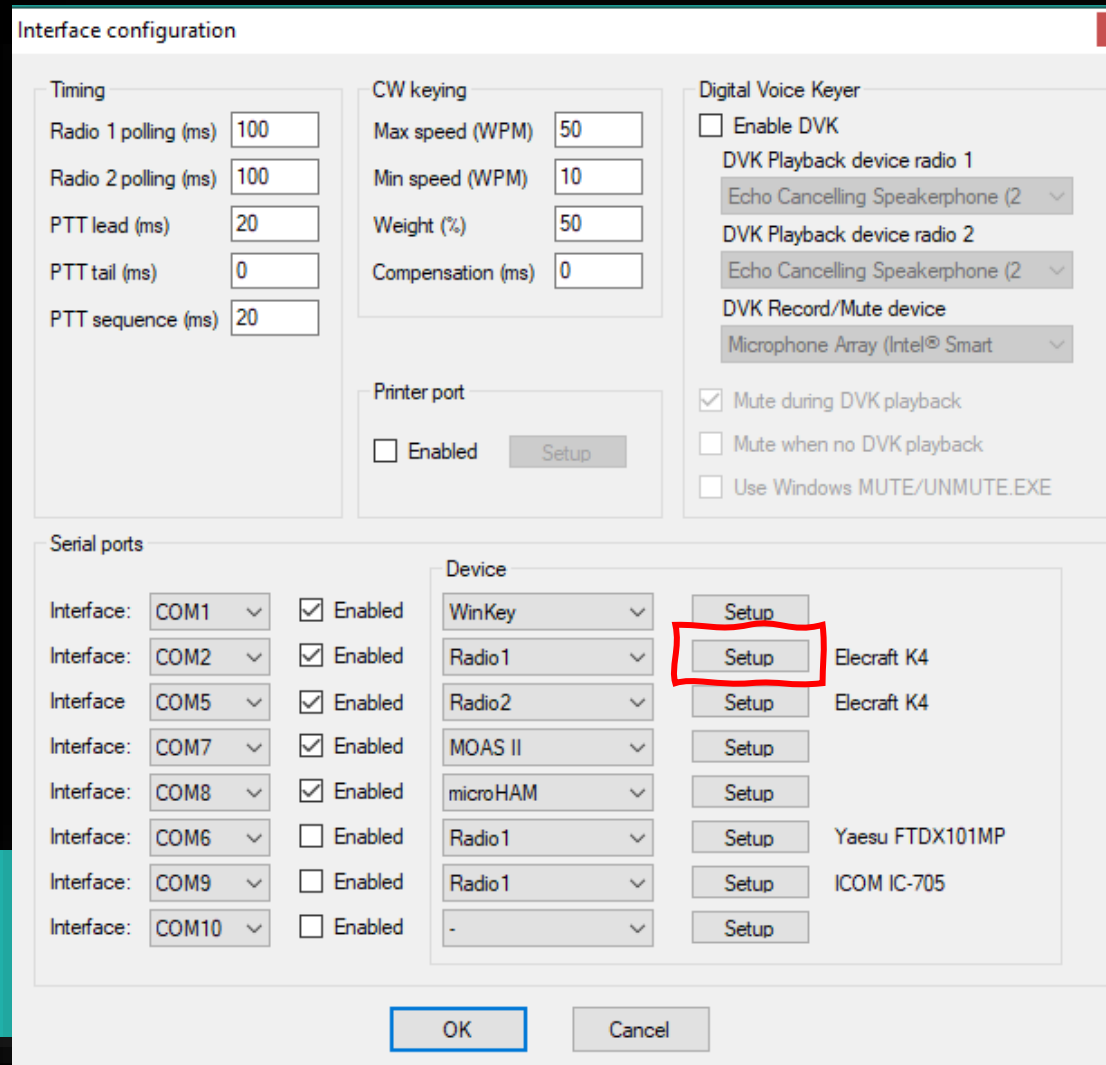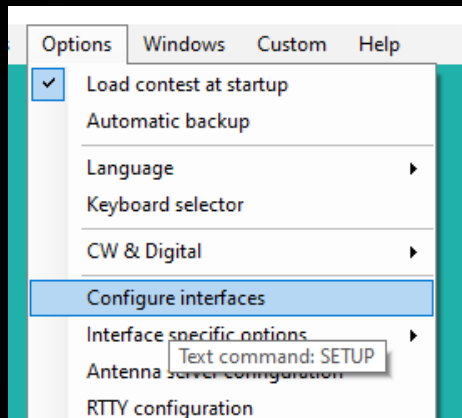


```
9 160 CW 13:41 LA4HH
10 160 CW 13:41 SE5E
11 160 CW 13:42 SETUP
```


Justera standardmeddelande

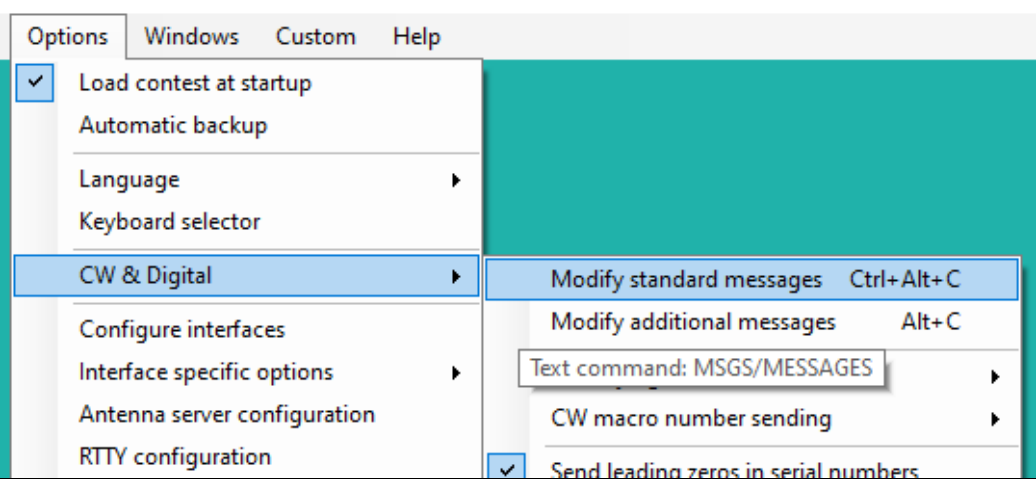

9	160	CW	13:41	LA4MM	599	599
10	160	CW	13:41	SE5E	599	599 INGO
11	160	CW	13:41	MSGS	599	599

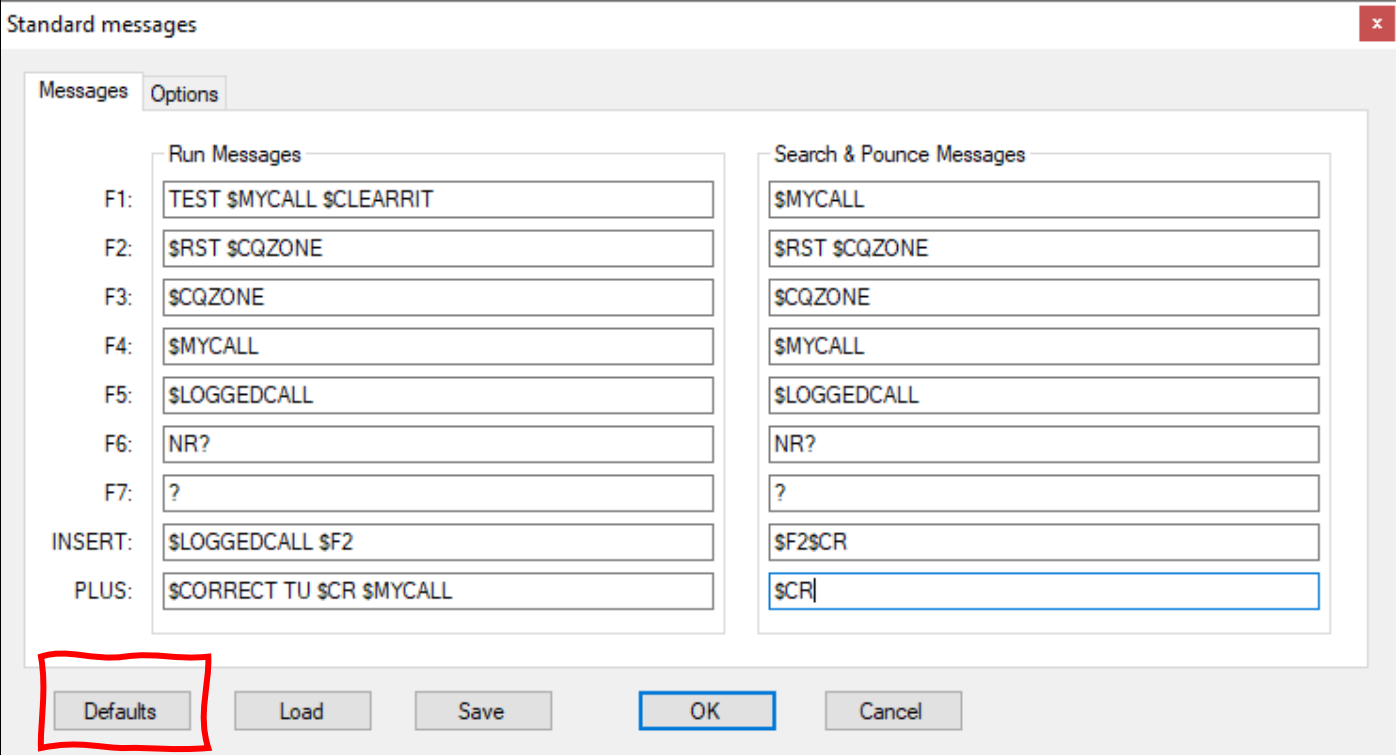

Välj arbetssätt

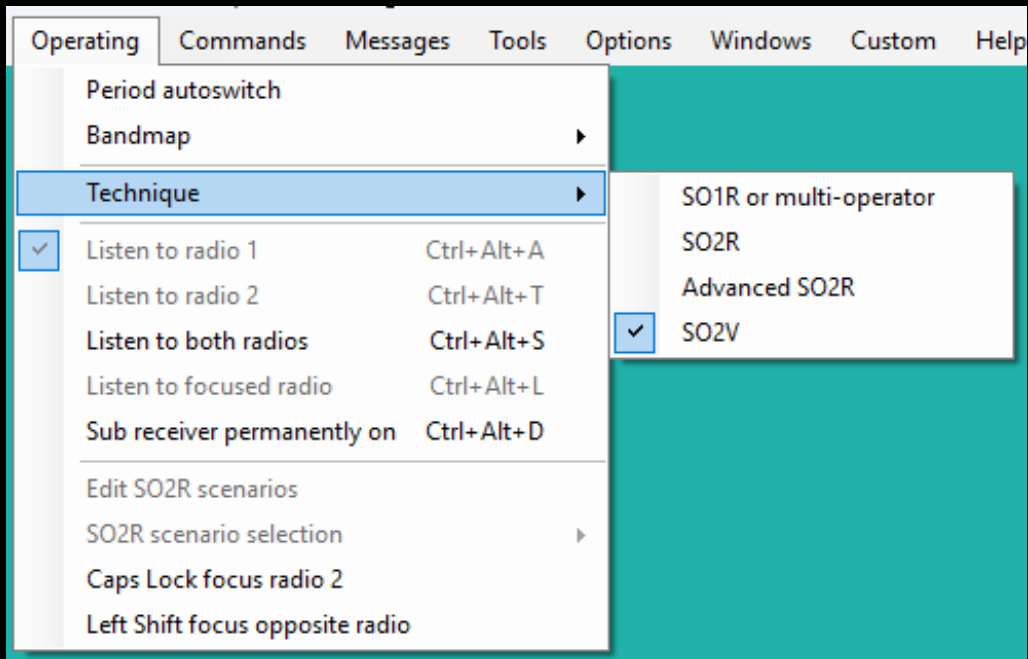

60 80 CW 16:38 AD8T 599 599 05 3 R1
LA8PV 5NN 14
61 80 CW 16:39 LA8PV 599 599 14 0 R
MULT NEEDED: 160,40,20,15,10
SO1R

60 80 CW 16:38 AD8T 599 599 05 3 R
LA8PV 5NN 14
61 80 CW 16:40 LA8PV 599 599 14 0 R
LZ5R 5NN 14
61 80 CW 16:40 LZ5R 599 599 15 0 R
MULT NEEDED: 160,40,20,15,10
SO2V

60 80 CW 16:38 AD8T 599 599 05 3 R1
LA8PV 5NN 14
61 80 CW 16:39 LA8PV 599 599 14 0 R1
LZ5R 5NN 14
61 80 CW 16:39 LZ5R 599 599 15 0 R2
MULT NEEDED: 160,40,20,15,10
SO2R

DXLog.net

dxlog.net/docs/index.php/Main_Page

Appar Mail LinkedIn FB Msg LoTW eQSL QRZ CL HA UF Claude Alla bokmärken

Sm7iun Talk Preferences Watchlist Contributions Log out

Main page Discussion Read Edit View history More Search DXLog.net

Main Page

DXLog.net documentation

I. Introduction

1. Reasons for chosing DXLog
2. History
3. Authors and Contributors

II. Installation

1. Download the software
2. Prerequisites
3. Installing DXLog
4. Installing intermediate releases
5. Resetting DXLog

III. Getting started


1. Reasons for choosing DXLog
2. User interface
3. Creating a log file
4. Controlling the radio
5. Databases
6. Operating techniques
7. Standard messages

Main page
Recent changes
Random page
Help about MediaWiki

Tools
What links here
Related changes
Upload file
Special pages
Printable version
Permanent link
Page information

Supported Contests - DXLog							
dxlog.net/sw/contestlist.php							
Appar Mail LinkedIn FB Msg LoTW eQSL QRZ CL HA UF Claude Perplexity Alla bokmärken							
DXLog Supported Contests DXLog wiki: Main Configuration Contest Definition Prefill database settings Current number of supported contests: 484							
Contest Name ↓	Contest Group ↑↓	Cabrillo Name ↑↓	Live Score Name ↑↓	Contest File ↑↓	Database File ↑↓	Warning File ↑↓	Regex File ↑↓
10-10 QSO Party		TENTEN-{MODE}	TENTEN-{MODE}	TENTENQP.txt	TENTEN_db.txt	TENTENQP_warning.txt	
13 Colonies Special Event		13COLONIES	13COLONIES	13COLONIES.txt	13COLONIES_db.txt		
7th Call Area QSO Party (7QP)	NA QSO PARTY	7QP	7QP-QSO-PARTY	7QP.txt	IN7NEQP_db.txt		
9A Activity	9A LOCAL CONTEST	9A-ACT	9A-ACT	9AACT.txt	vhf_uhf_r1_db.txt		
9A CW	LEGACY CONTEST	9A-CW	9A-CW	9ACW.txt			
9A DX		9A-DX	9A-DX	9ADX.txt	9ADX_db.txt		
9KCC 15-m Contest	LEGACY CONTEST	9KCC-{MODE}	9KCC-{MODE}	9KCC.txt			
A.R.I. International DX Contest		ARI-DX	ARI-DX	ARI_DX.txt	ARI_DX_db.txt		
A1CLUB Weekly Contest		AWT	AWT	A1CWC.txt	A1CWC_db.txt	A1CWC_warning.txt	
AGB Party Contest		AGB-PARTY	AGB-PARTY	AGB_PARTY.txt	AGB_db.txt	AGB_PARTY_warning.txt	
AGCW Handtastenparty		AGCW-HTP	AG-CW	AGCW_HTP.txt	AGCWNTCQP_db.txt	AGCW_QRP_warning.txt	
AGCW Happy New Year Contest		AGCW HNY	AG-CW	AGCW_HNY.txt	AGCW_db.txt	AGCW_HNY_warning.txt	
AGCW QRP Contest		AGCW-QRP	AG-CW	AGCW_QRP.txt	AGCW_db.txt	AGCW_QRP_warning.txt	
AGCW QRP-QRP-Party		AGCW QRP	AG-CW	AGCW_QRPQRP.txt		AGCW_QRPQRP_warning.txt	
AGCW VHF/UHF-Contest	VHF/UHF/SHF	AG-CW	AG-CW	AGCW_VHF.txt	vhf_uhf_r1_db.txt		

Lite nytt i DXLog

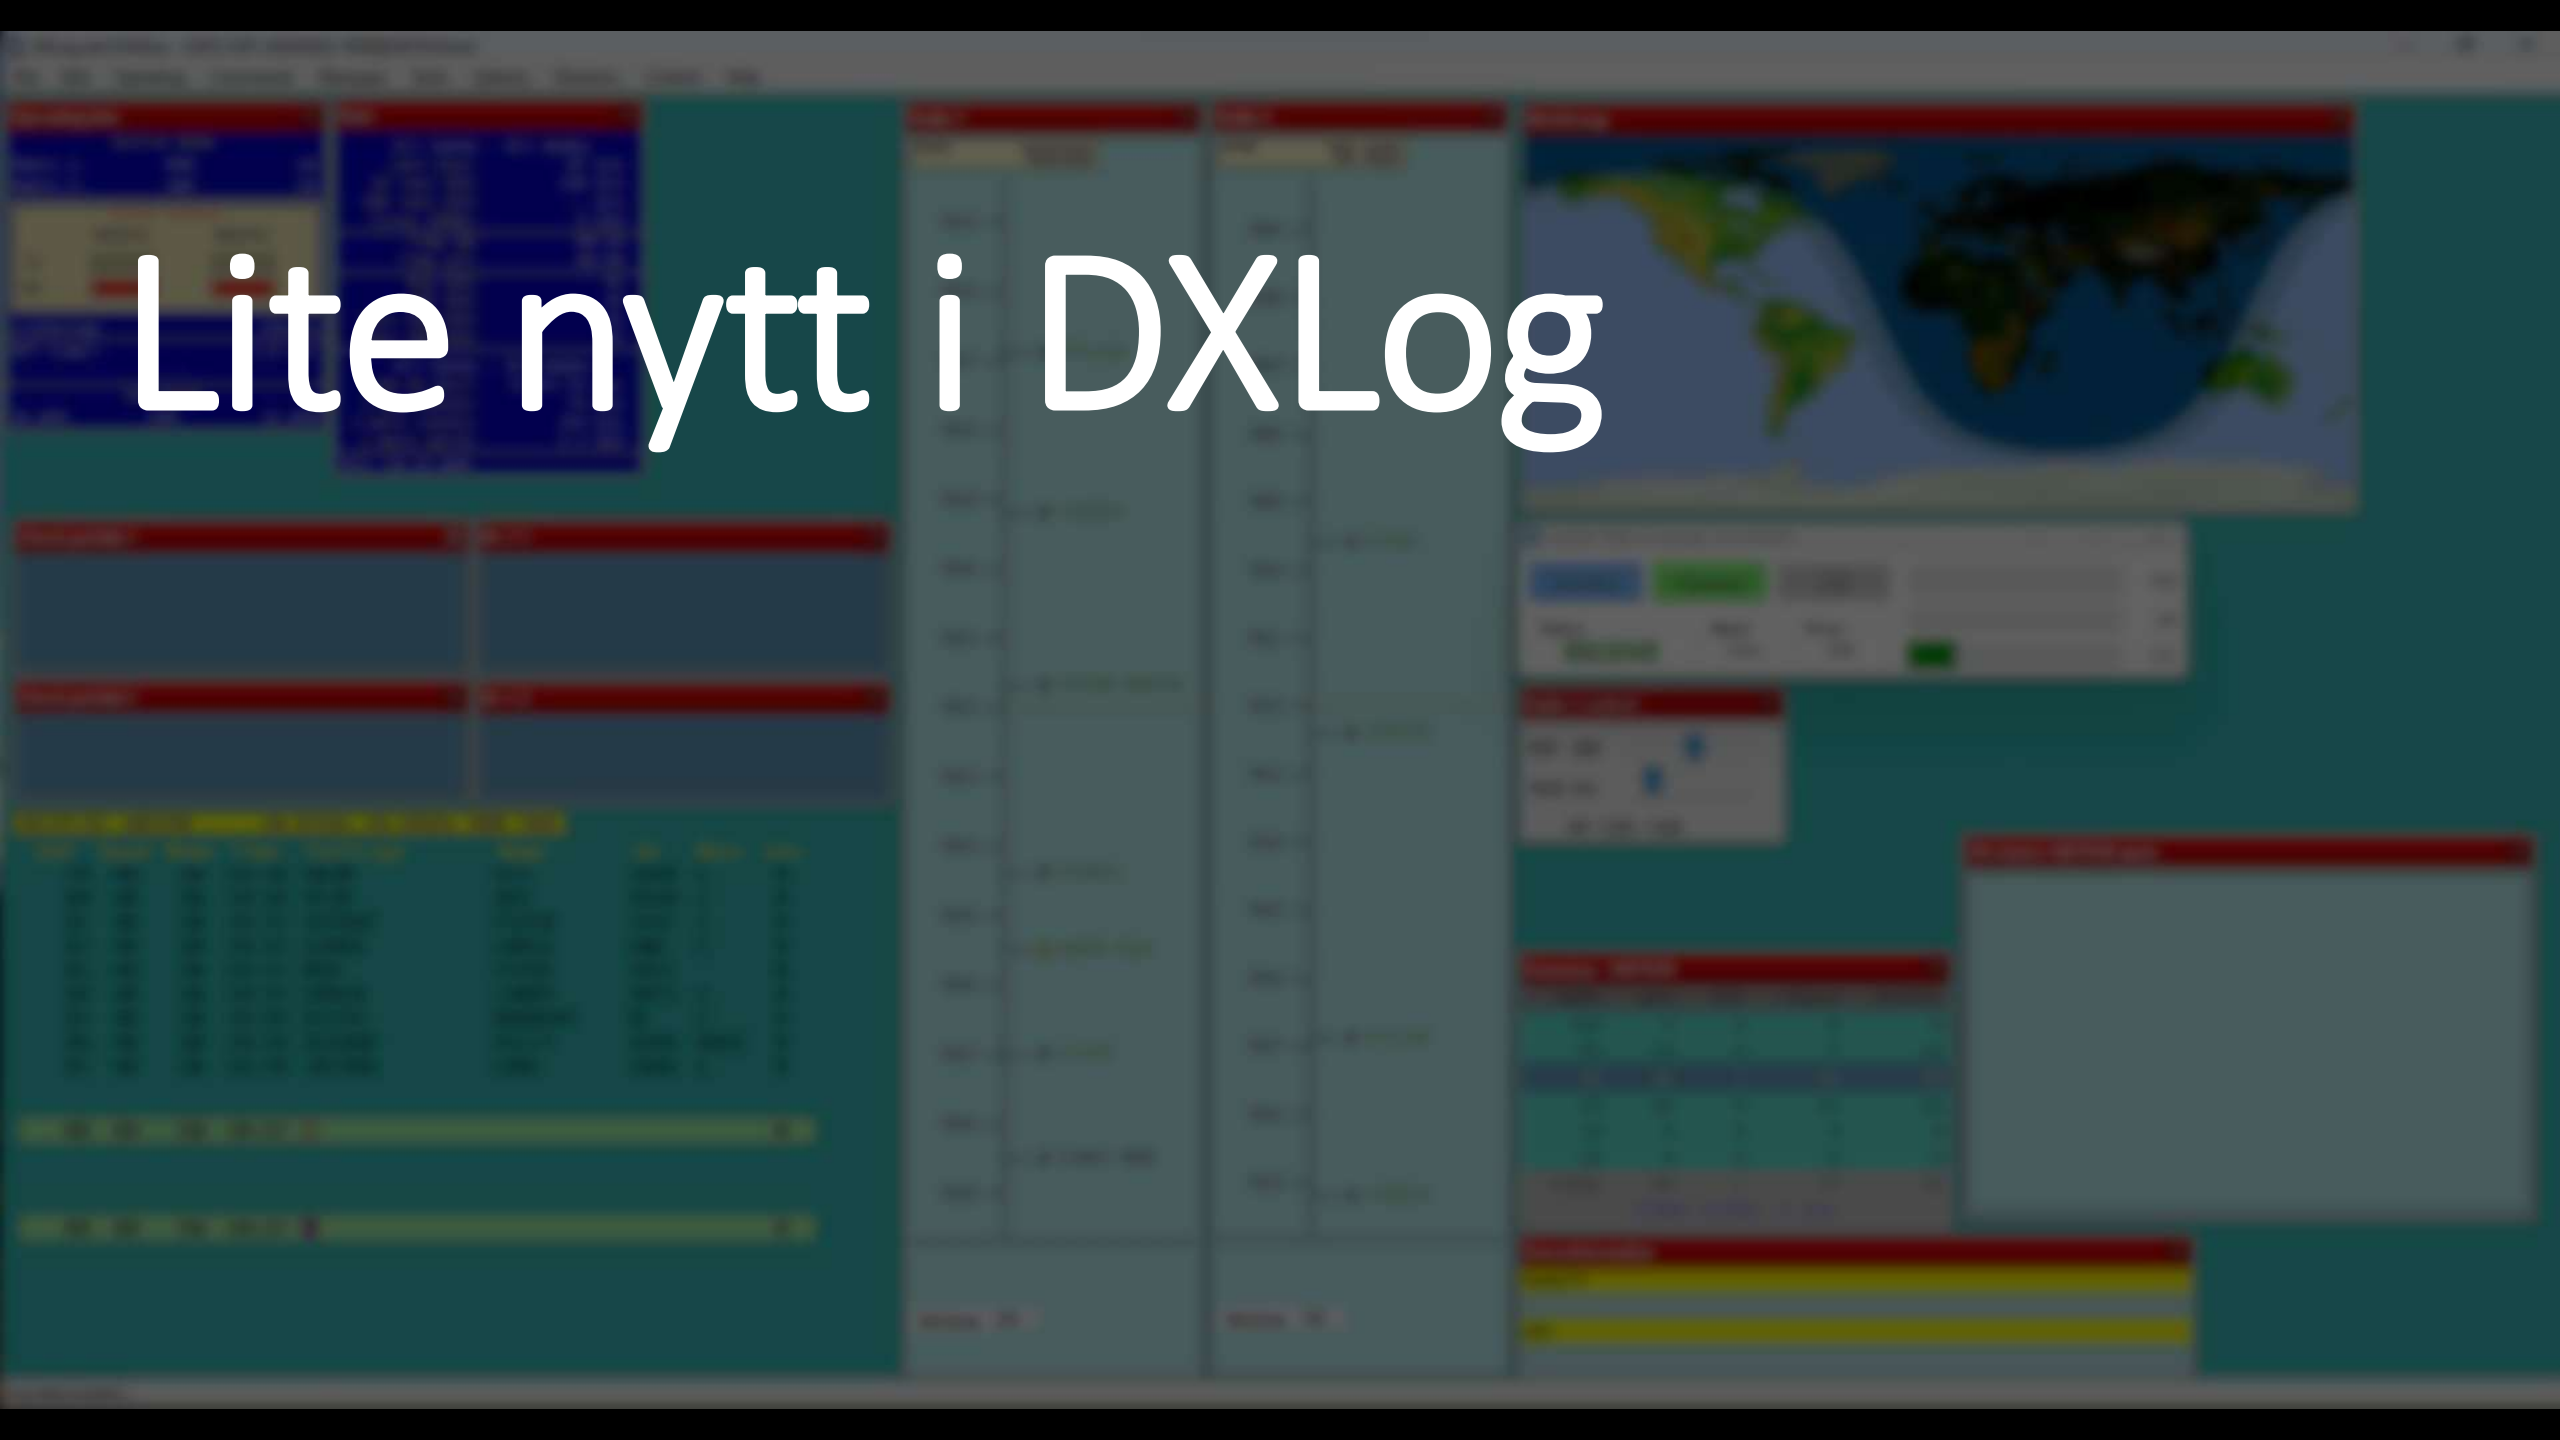

Lite nytt i DXLog

- Mängder med buggfixar
- Mängder med förbättringar för digitalt
- Stöd för hamscore.com
- Ctrl-Q
- Automatisk nedladdning och installation av uppdateringar
- Förbättrad prestanda för spektrum i bandkartan
- Varning för non-assisted och perioder
- Stöd för ett dussintals fler tester
- Förbättrad WSJT-X loggning
- Dramatisk uppsnabbning av ADIF-export för stora loggar
- Exchange info fönster
- Mer detaljerad ADIF-export
- Fixad CW stamning
- Stöd för en massa nya radio som t.ex. IC-7760
- Cluster svartlistningsfunktion med wildcards
- Stöd för >100,000 QSO i en logg
- Justerbar bredd på vattenfall
- Stöd för två separata Winkeyers
- Stöd för radions inbyggda DVK för en massa radiomodeller
- Förbättrad rate statistik
- Förbättrad algoritm för N+1 partial
- Azimuthkarta
- Få \$TIME att den sända samma vid omsändning
- ~400 rader i release notes sen förra årsmötet


Förenklat och utökat stöd för online scoreboard

Live score server settings


Type	Score distributor (all scoreboards)
Interval	Score distributor (all scoreboards)
http address	Real Time Contest (hamscore.com)
https address	Live Score (contest.run)
User name	Live Cabrillo (contest.run)
Password	SloVHF (slovhf.net)
	Score via unauthenticated http
	Score via secure https
	Score via UDP broadcast

OK Cancel

Svartlistning av signaler och spottare

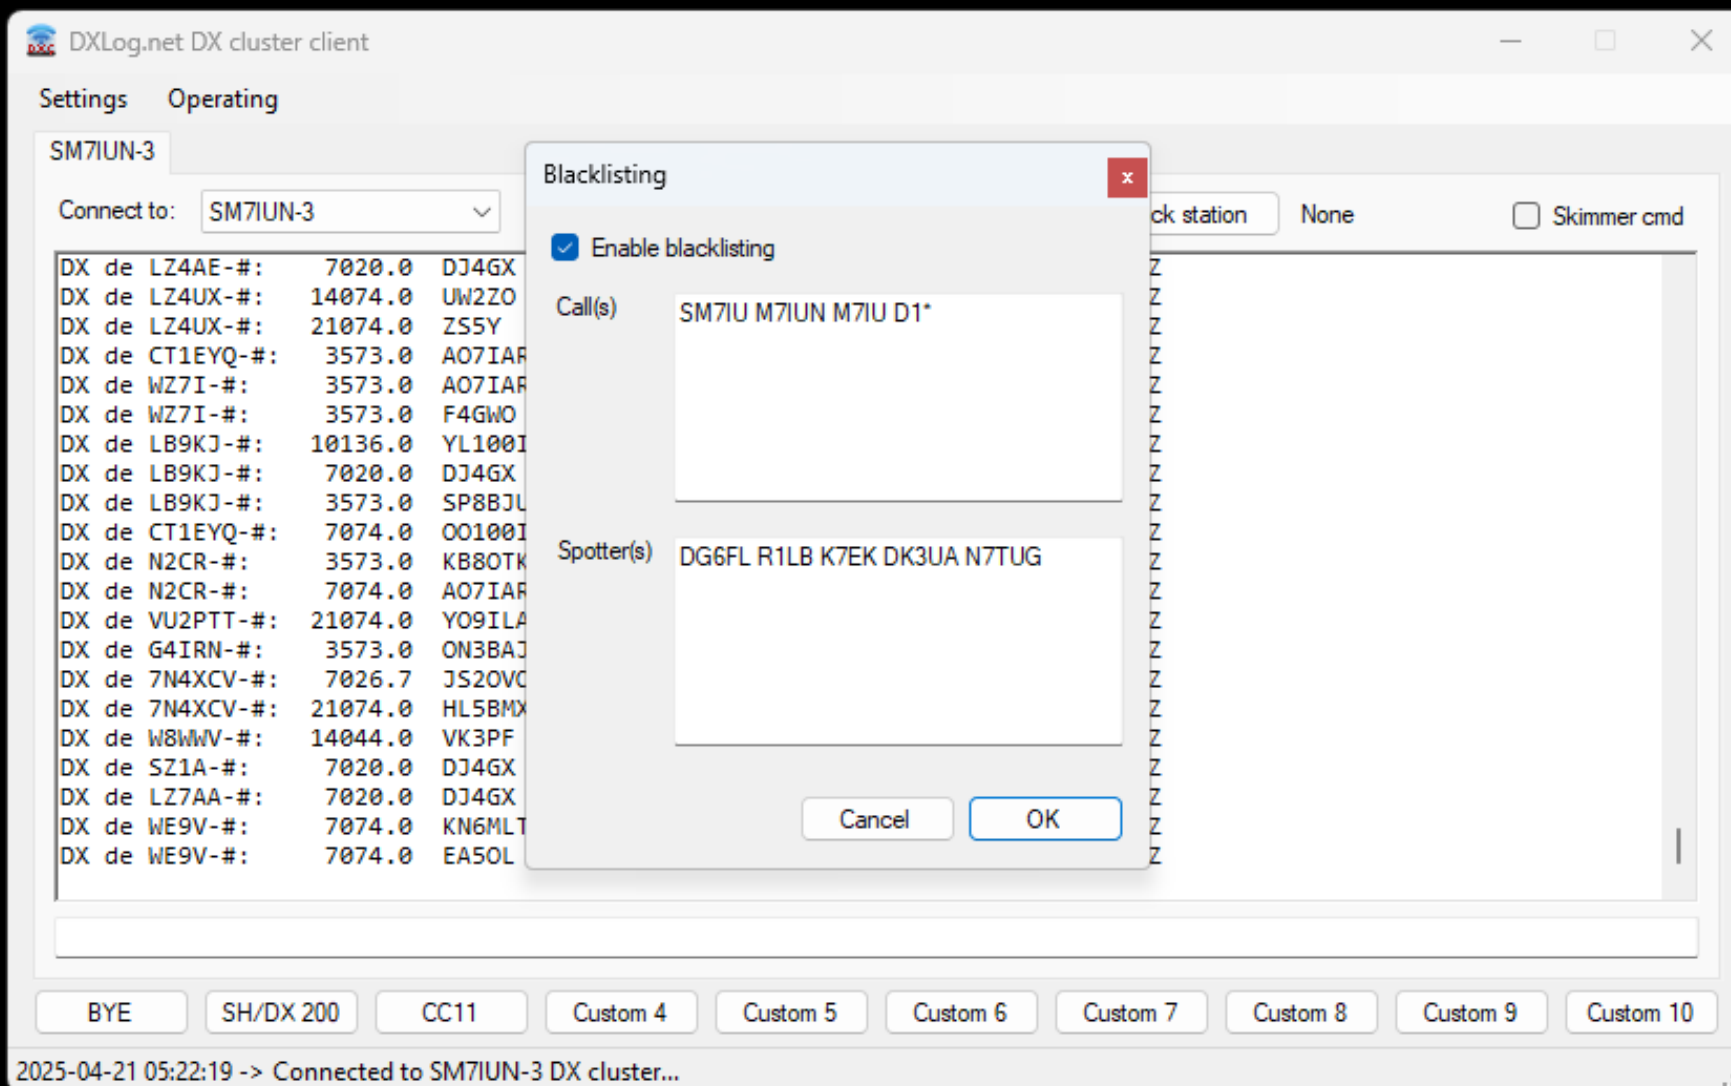

Azimuthal kartprojektion

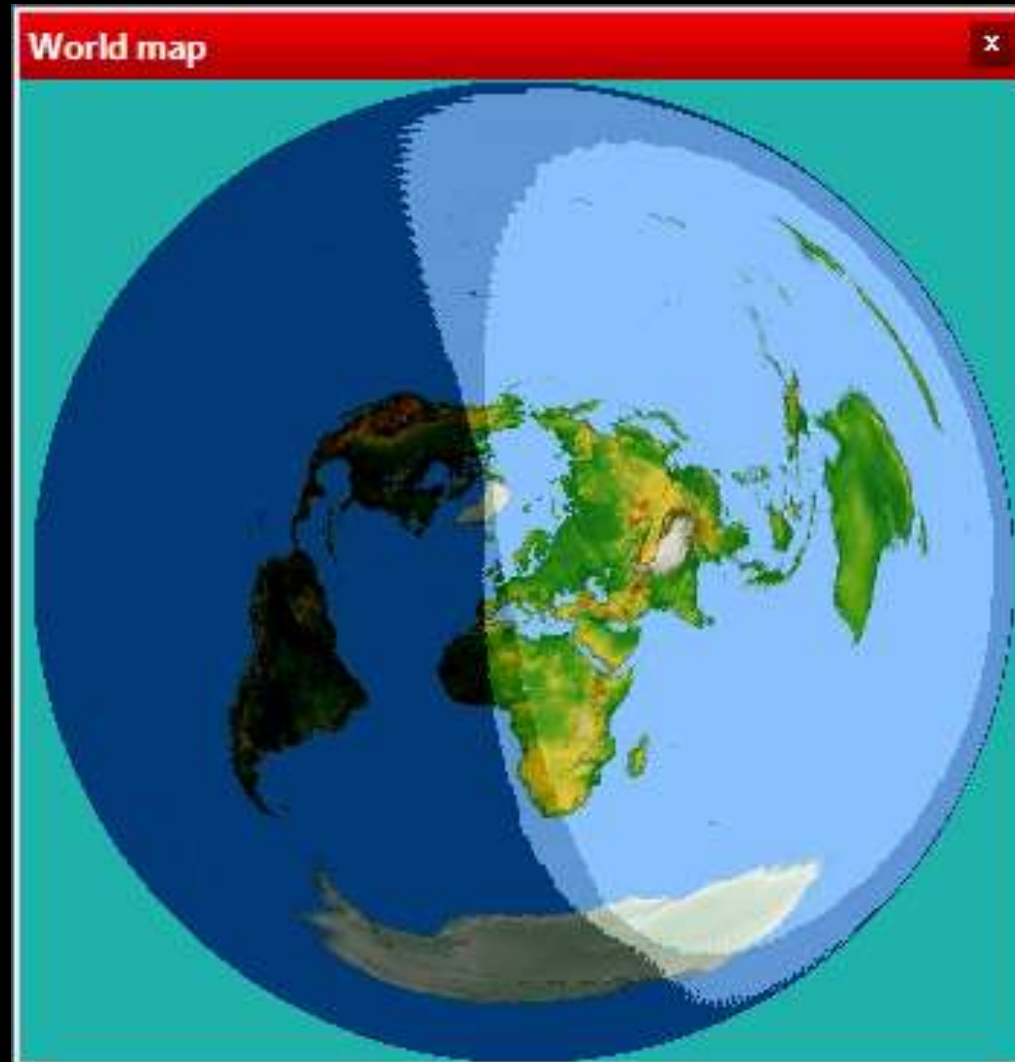

Varning för unassisted kategori och perioder

Contest configuration

Station

Callsign Grid square Exchange

DXCC prefix CQ zone ITU zone State/Province/Other

Contact

Name

Address

Address

City State Zip

Country Email

Club

☐ Request certificate

Contest

Contest

Category DX cluster spots disabled

Station Mode

Overlay Operator name

Class Power

Operators

OK Cancel

Contest configuration

Station

Callsign Grid square Exchange

DXCC prefix CQ zone ITU zone State/Province/Other

Contact

Name

Address

Address

City State Zip

Country Email

Club

☐ Request certificate

Contest

Contest Contest has periods

Category

Station Mode

Overlay Operator name

Class Power

Operators

OK Cancel

Ctrl-Q

Position ▶

SO2R/V view type ▶

☒ Stay in field while moving up and down in the log

☒ Restrict up arrow movement

☐ Use focus background color in SO2R(V)

☒ Show previous and current messages

☐ Show previous and current messages

QSO	Band	Mode	Time	Callsign	Name	ID	Mult	Stn
1	40	CW	13:05	DL6KVA	AXEL	1678	C	R
2	40	CW	13:05	SE5E	INGO	2097	C	R
3	40	CW	13:05	SM6M	PETER	2663	C	R
4	40	CW	13:06	SM7CIL	ARNE	1410	C	R
5	40	CW	13:06	G4KLE	MERV	3283	C	R
6	40	CW	13:06	G4MEM	MARK	G	C	R
7	40	CW	13:06	G4KQY	MIKE	2987	C	R
8	40	CW	13:06	SE0B	CLAES	1849	C	R
9	40	CW	13:06	SD6M	PER	1773	C	R
CQ CW 7IUN								
10	40	CW	14:53					R
SM7IUN								
10	40	CW	14:53					R

SO2V – en underskattat vapen




- "Single Operator, 2 VFO"
- Lillebror till SO2R
- Blanda Run och S&P nästan sömlöst
- Två mottagare är bättre än en

Grundkrav: 2 VFO

Exempel med två VFO och en mottagare:

IC-7300, IC-705, TS-590, TS-890, FT-710,
FTDX10, FTX-1F, K3 i grundutförande


Enkel mottagare

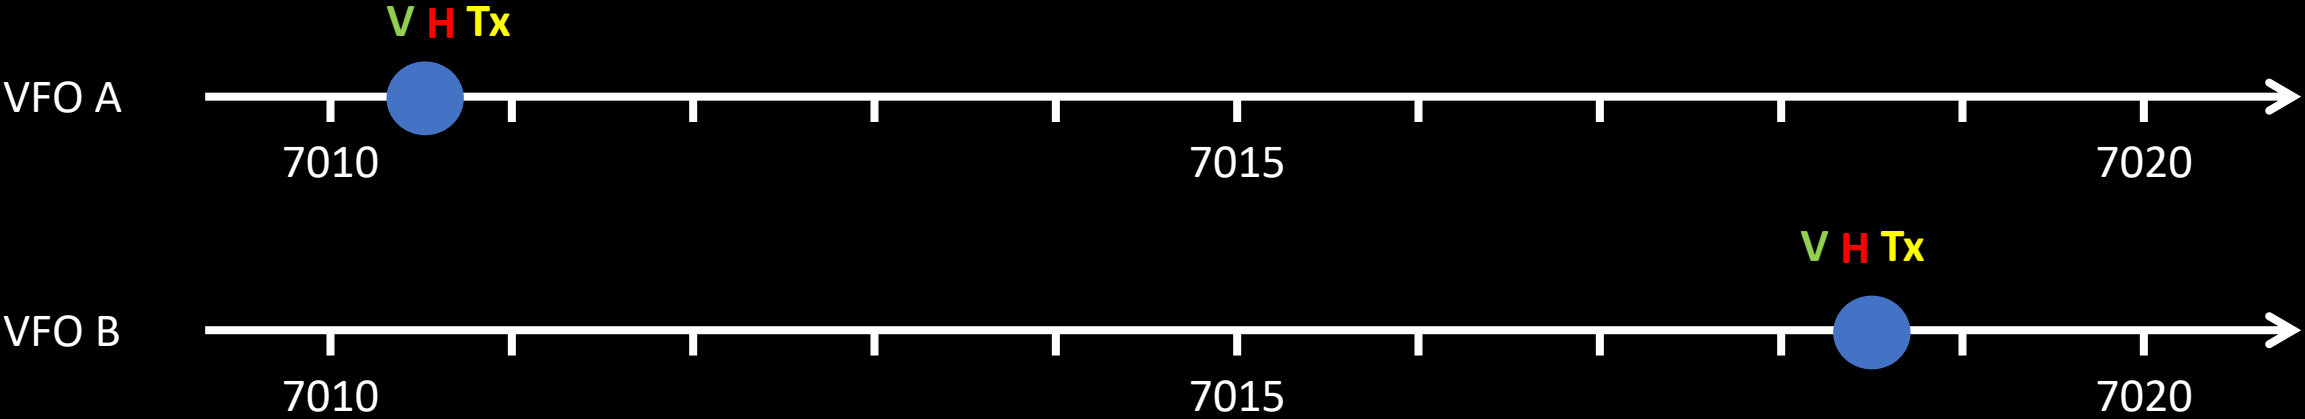



QSO	Band	Mode	Time	Callsign	Name	ID	Mult	Stn
1	40	CW	13:05	DL6KVA	AXEL	1678	C	R
2	40	CW	13:05	SE5E	INGO	2097	C	R
3	40	CW	13:05	SM6M	PETER	2663	C	R
4	40	CW	13:06	SM7CIL	ARNE	1410	C	R
5	40	CW	13:06	G4KLE	MERV	3283	C	R
6	40	CW	13:06	G4MEM	MARK	G	C	R
7	40	CW	13:06	G4KQY	MIKE	2987	C	R
8	40	CW	13:06	SE0B	CLAES	1849	C	R
9	40	CW	13:06	SD6M	PER	1773	C	R
CQ CWT SM7IUN								
10	40	CW	14:53					R
SM7IUN								
10	40	CW	14:53					R

QSO	Band	Mode	Time	Callsign	Name	ID	Mult	Stn
1	40	CW	13:05	DL6KVA	AXEL	1678	C	R
2	40	CW	13:05	SE5E	INGO	2097	C	R
3	40	CW	13:05	SM6M	PETER	2663	C	R
4	40	CW	13:06	SM7CIL	ARNE	1410	C	R
5	40	CW	13:06	G4KLE	MERV	3283	C	R
6	40	CW	13:06	G4MEM	MARK	G	C	R
7	40	CW	13:06	G4KQY	MIKE	2987	C	R
8	40	CW	13:06	SE0B	CLAES	1849	C	R
9	40	CW	13:06	SD6M	PER	1773	C	R
CQ CWT SM7IUN								
10	40	CW	14:53					R
SM7IUN								
10	40	CW	14:53					R


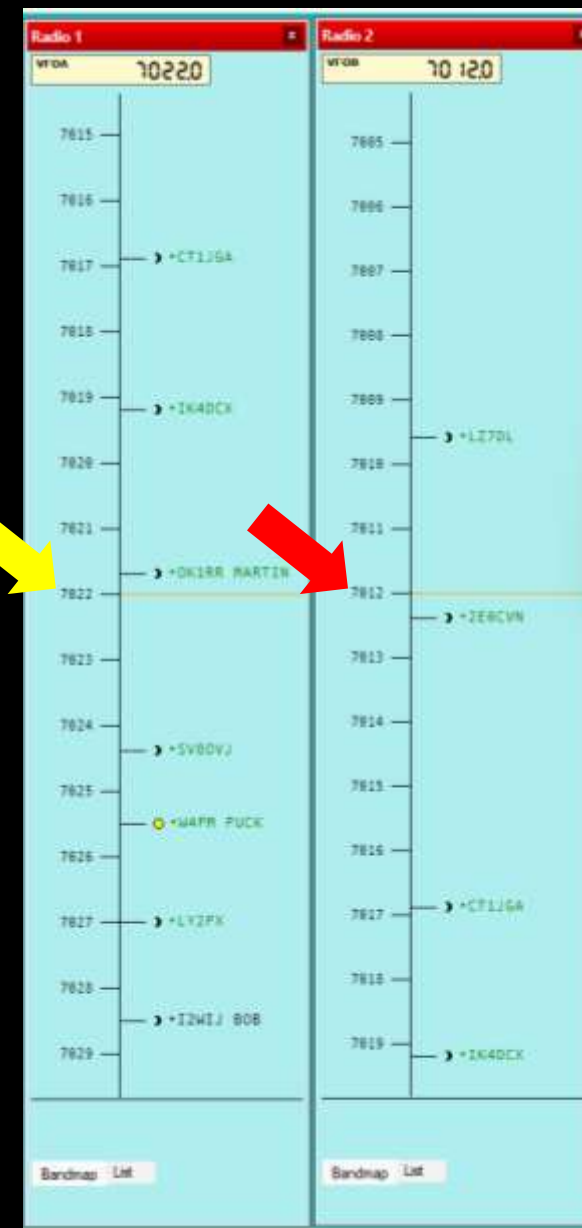


Bättre: Dubbla mottagare

Exempel på radio med dubbla mottagare:

IC-7851, IC-7760, IC-7610, FT-1000, FT-2000, FTDX101D, K3, K4, TS-990, FlexRadio

Inställningar

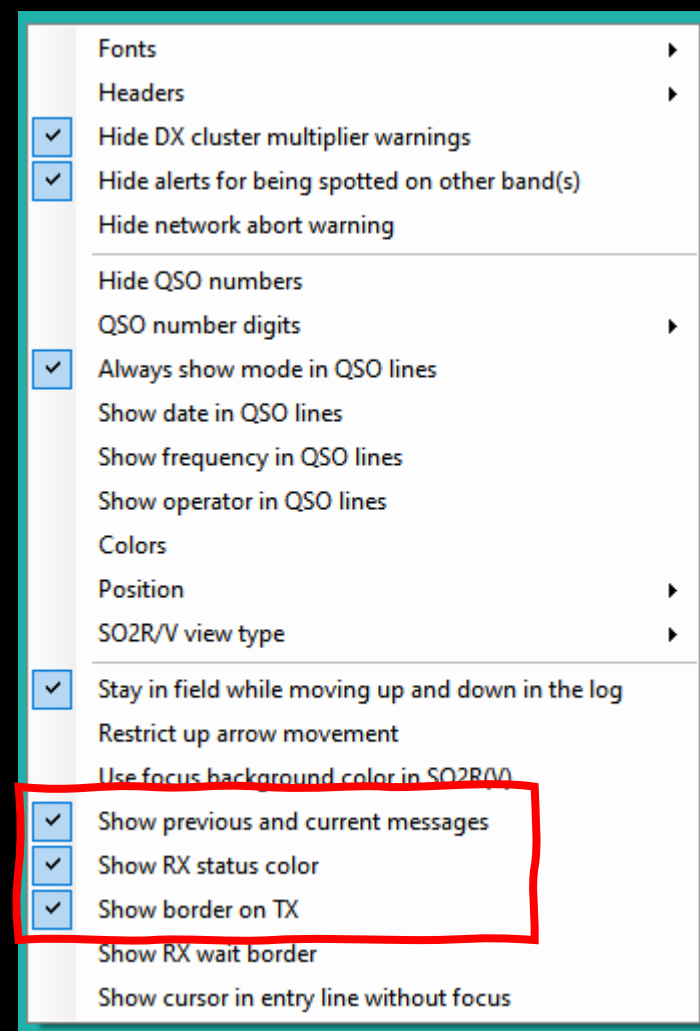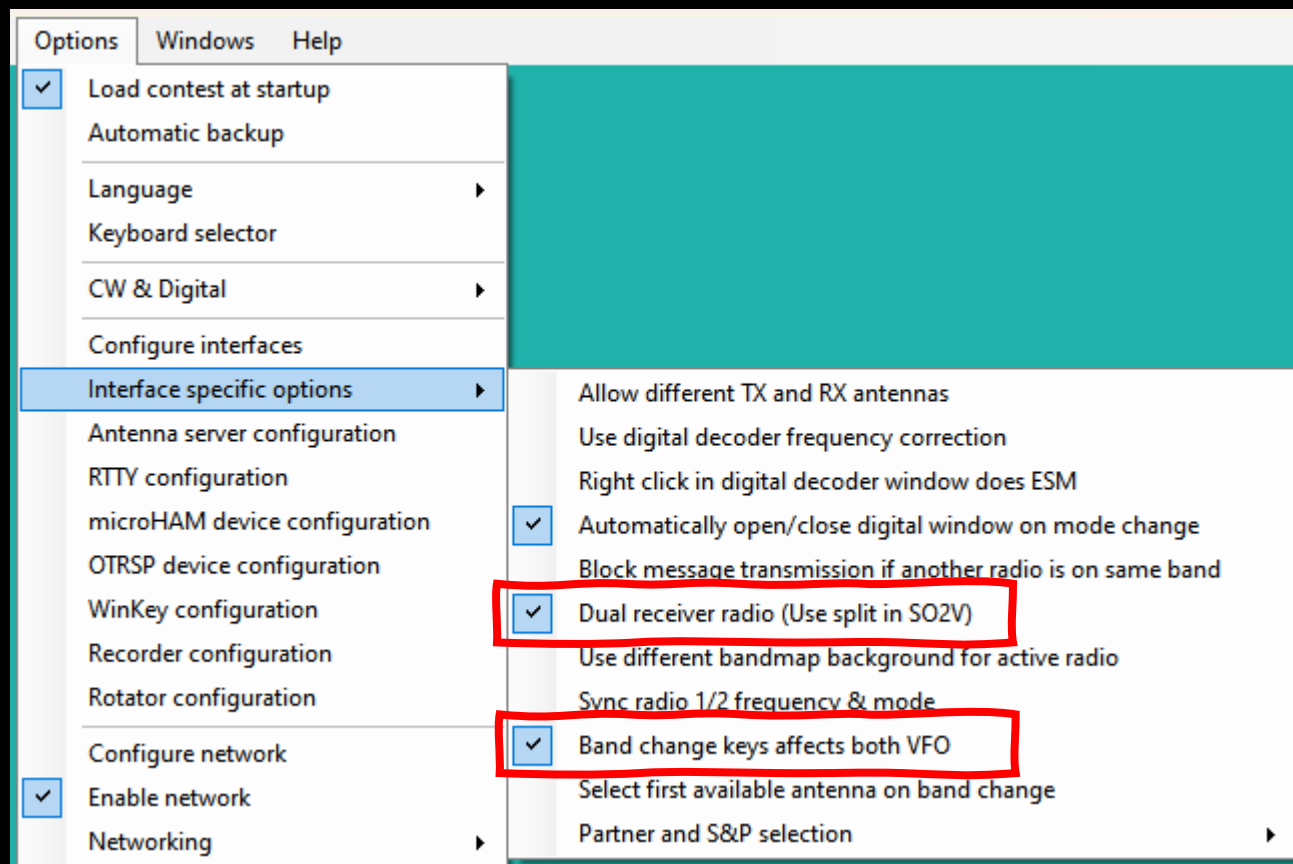

Radio 1



VFOA

70 18.6

7015 — •SX0W 20

7016 — •G4DMC 14

7017 — •RA3MG 16
— •RL2T 16

7018 — •OP5K 14

CQ —

7019 — •DA0WWA 14

7020 — •II7WWA 15

7021 — •II5WWA 15

7022 —

Bandmap

List

Radio 2



VFOB

70 16.5

7013 —

7014 —

7015 — •SX0W 20

7016 —

•G4DMC 14

7017 — •RA3MG 16
— •RL2T 16

7018 — •OP5K 14

7019 — •DA0WWA 14

7020 —

2 min <MM0ZBH-#>
CW 31 dB 23 WPM CQ


Bandmap

List

Switchad submottagare



Submottagare ständigt på

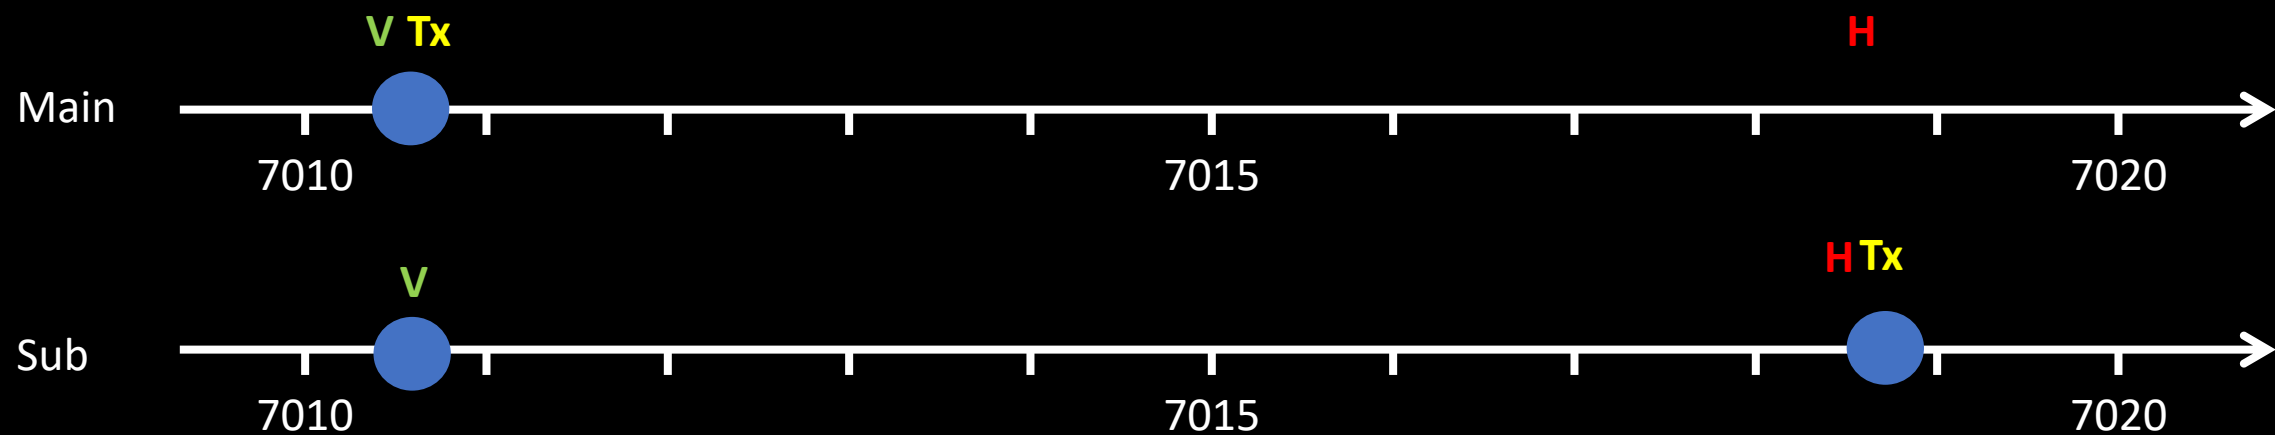



QSO	Band	Mode	Time	Callsign	Name	ID	Mult	Stn
1	40	CW	13:05	DL6KVA	AXEL	1678	C	R
2	40	CW	13:05	SE5E	INGO	2097	C	R
3	40	CW	13:05	SM6M	PETER	2663	C	R
4	40	CW	13:06	SM7CIL	ARNE	1410	C	R
5	40	CW	13:06	G4KLE	MERV	3283	C	R
6	40	CW	13:06	G4MEM	MARK	6	C	R
7	40	CW	13:06	G4KQY	MIKE	2987	C	R
8	40	CW	13:06	SE0B	CLAES	1849	C	R
9	40	CW	13:06	SD6M	PER	1773	C	R
CQ CWT SM7IUN								
10	40	CW	14:52					R
SM7IUN								
10	40	CW	14:52					R

QSO	Band	Mode	Time	Callsign	Name	ID	Mult	Stn
1	40	CW	13:05	DL6KVA	AXEL	1678	C	R
2	40	CW	13:05	SE5E	INGO	2097	C	R
3	40	CW	13:05	SM6M	PETER	2663	C	R
4	40	CW	13:06	SM7CIL	ARNE	1410	C	R
5	40	CW	13:06	G4KLE	MERV	3283	C	R
6	40	CW	13:06	G4MEM	MARK	6	C	R
7	40	CW	13:06	G4KQY	MIKE	2987	C	R
8	40	CW	13:06	SE0B	CLAES	1849	C	R
9	40	CW	13:06	SD6M	PER	1773	C	R
CQ CWT SM7IUN								
10	40	CW	14:53					R
SM7IUN								
10	40	CW	14:53					R



QSO	Band	Mode	Time	Callsign	Name	ID	Mult	Stn
1	40	CW	13:05	DL6KVA	AXEL	1678	C	R
2	40	CW	13:05	SE5E	INGO	2097	C	R
3	40	CW	13:05	SM6M	PETER	2663	C	R
4	40	CW	13:06	SM7CIL	ARNE	1410	C	R
5	40	CW	13:06	G4KLE	MERV	3283	C	R
6	40	CW	13:06	G4MEM	MARK	6	C	R
7	40	CW	13:06	G4KQY	MIKE	2987	C	R
8	40	CW	13:06	SE0B	CLAES	1849	C	R
9	40	CW	13:06	SD6M	PER	1773	C	R
CQ CWT SM7IUN								
10	40	CW	14:53					R
SM7IUN								
10	40	CW	14:53					R

Viktiga knappar i SO2V

↑↓ Keypad ×	Växla focus mellan main och sub VFO
Ctrl-Alt-S	Slå av och på submottagaren när main VFO är i fokus
Ctrl-Alt-D	Slå av och på permanent submottagare
Shift-Ctrl-F1	Växla fokus till main VFO och sänd CQ
Ctrl-F4	Sätt den andra VFO till samma frekvens
Keypad ÷	Växla VFO-knappens fokus
Alt-Keypad ×	Utväxla VFO:ernas frekvens och mode
Ctrl-↑↓	Grabba spottar på fokuserad VFO
Ctrl-Alt-↑↓	Grabba spottar på andra VFO

Tänk på att Ctrl-Alt också är AltGr på Europeiska tangentbord


Snabbknappar

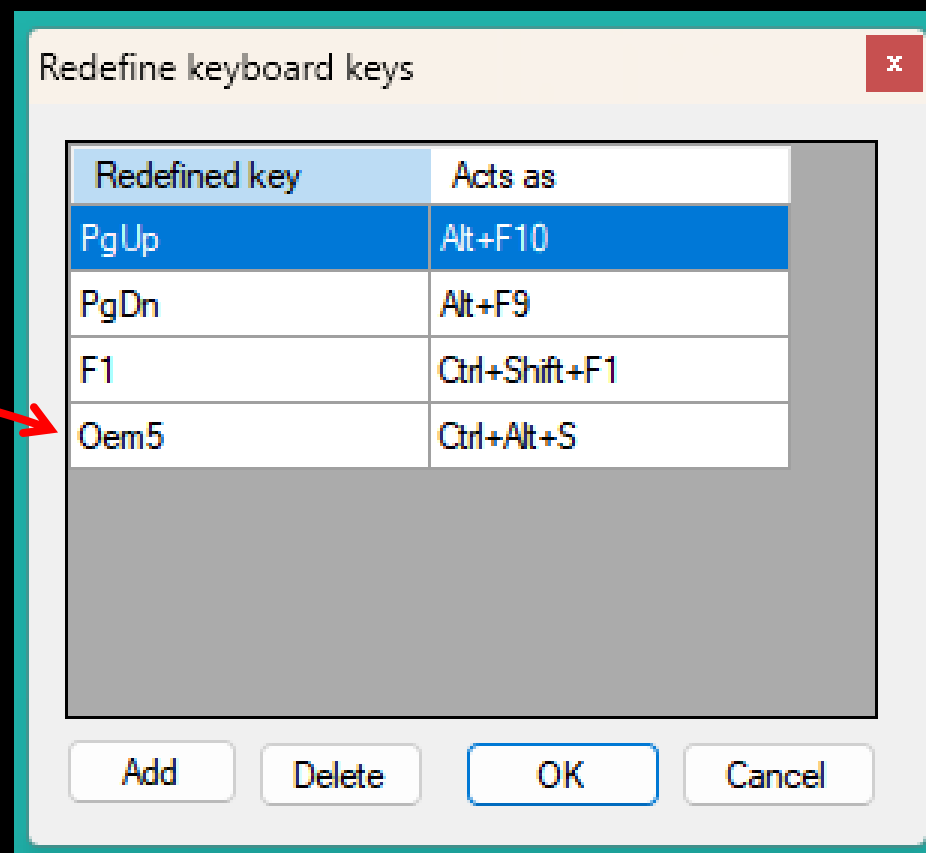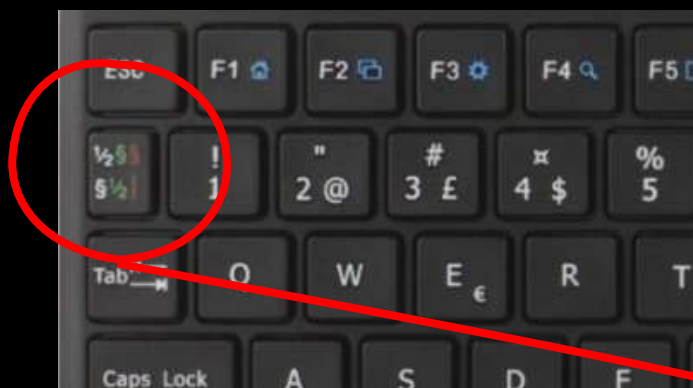

Tips

- Ropa CQ på main och kör S&P på sub VFO
- Träna på att fokusera och ta emot på ena örat
- Träna på situationer och knappsekvenser
 - Stäng av submottagaren när en svag station svarar ditt CQ
 - Kör en station på sub VFO medans du vaktar din CQ-frekvens
 - Assisted: Hoppa mellan spottar på andra VFO och lyssna kort
 - Non-assisted: Lyssna runt på submottagaren i luckorna mellan CQ
- CWOps CWT är perfekt för träning.
 - Onsdag 13 och 19Z, Torsdag 07Z

In-band operation

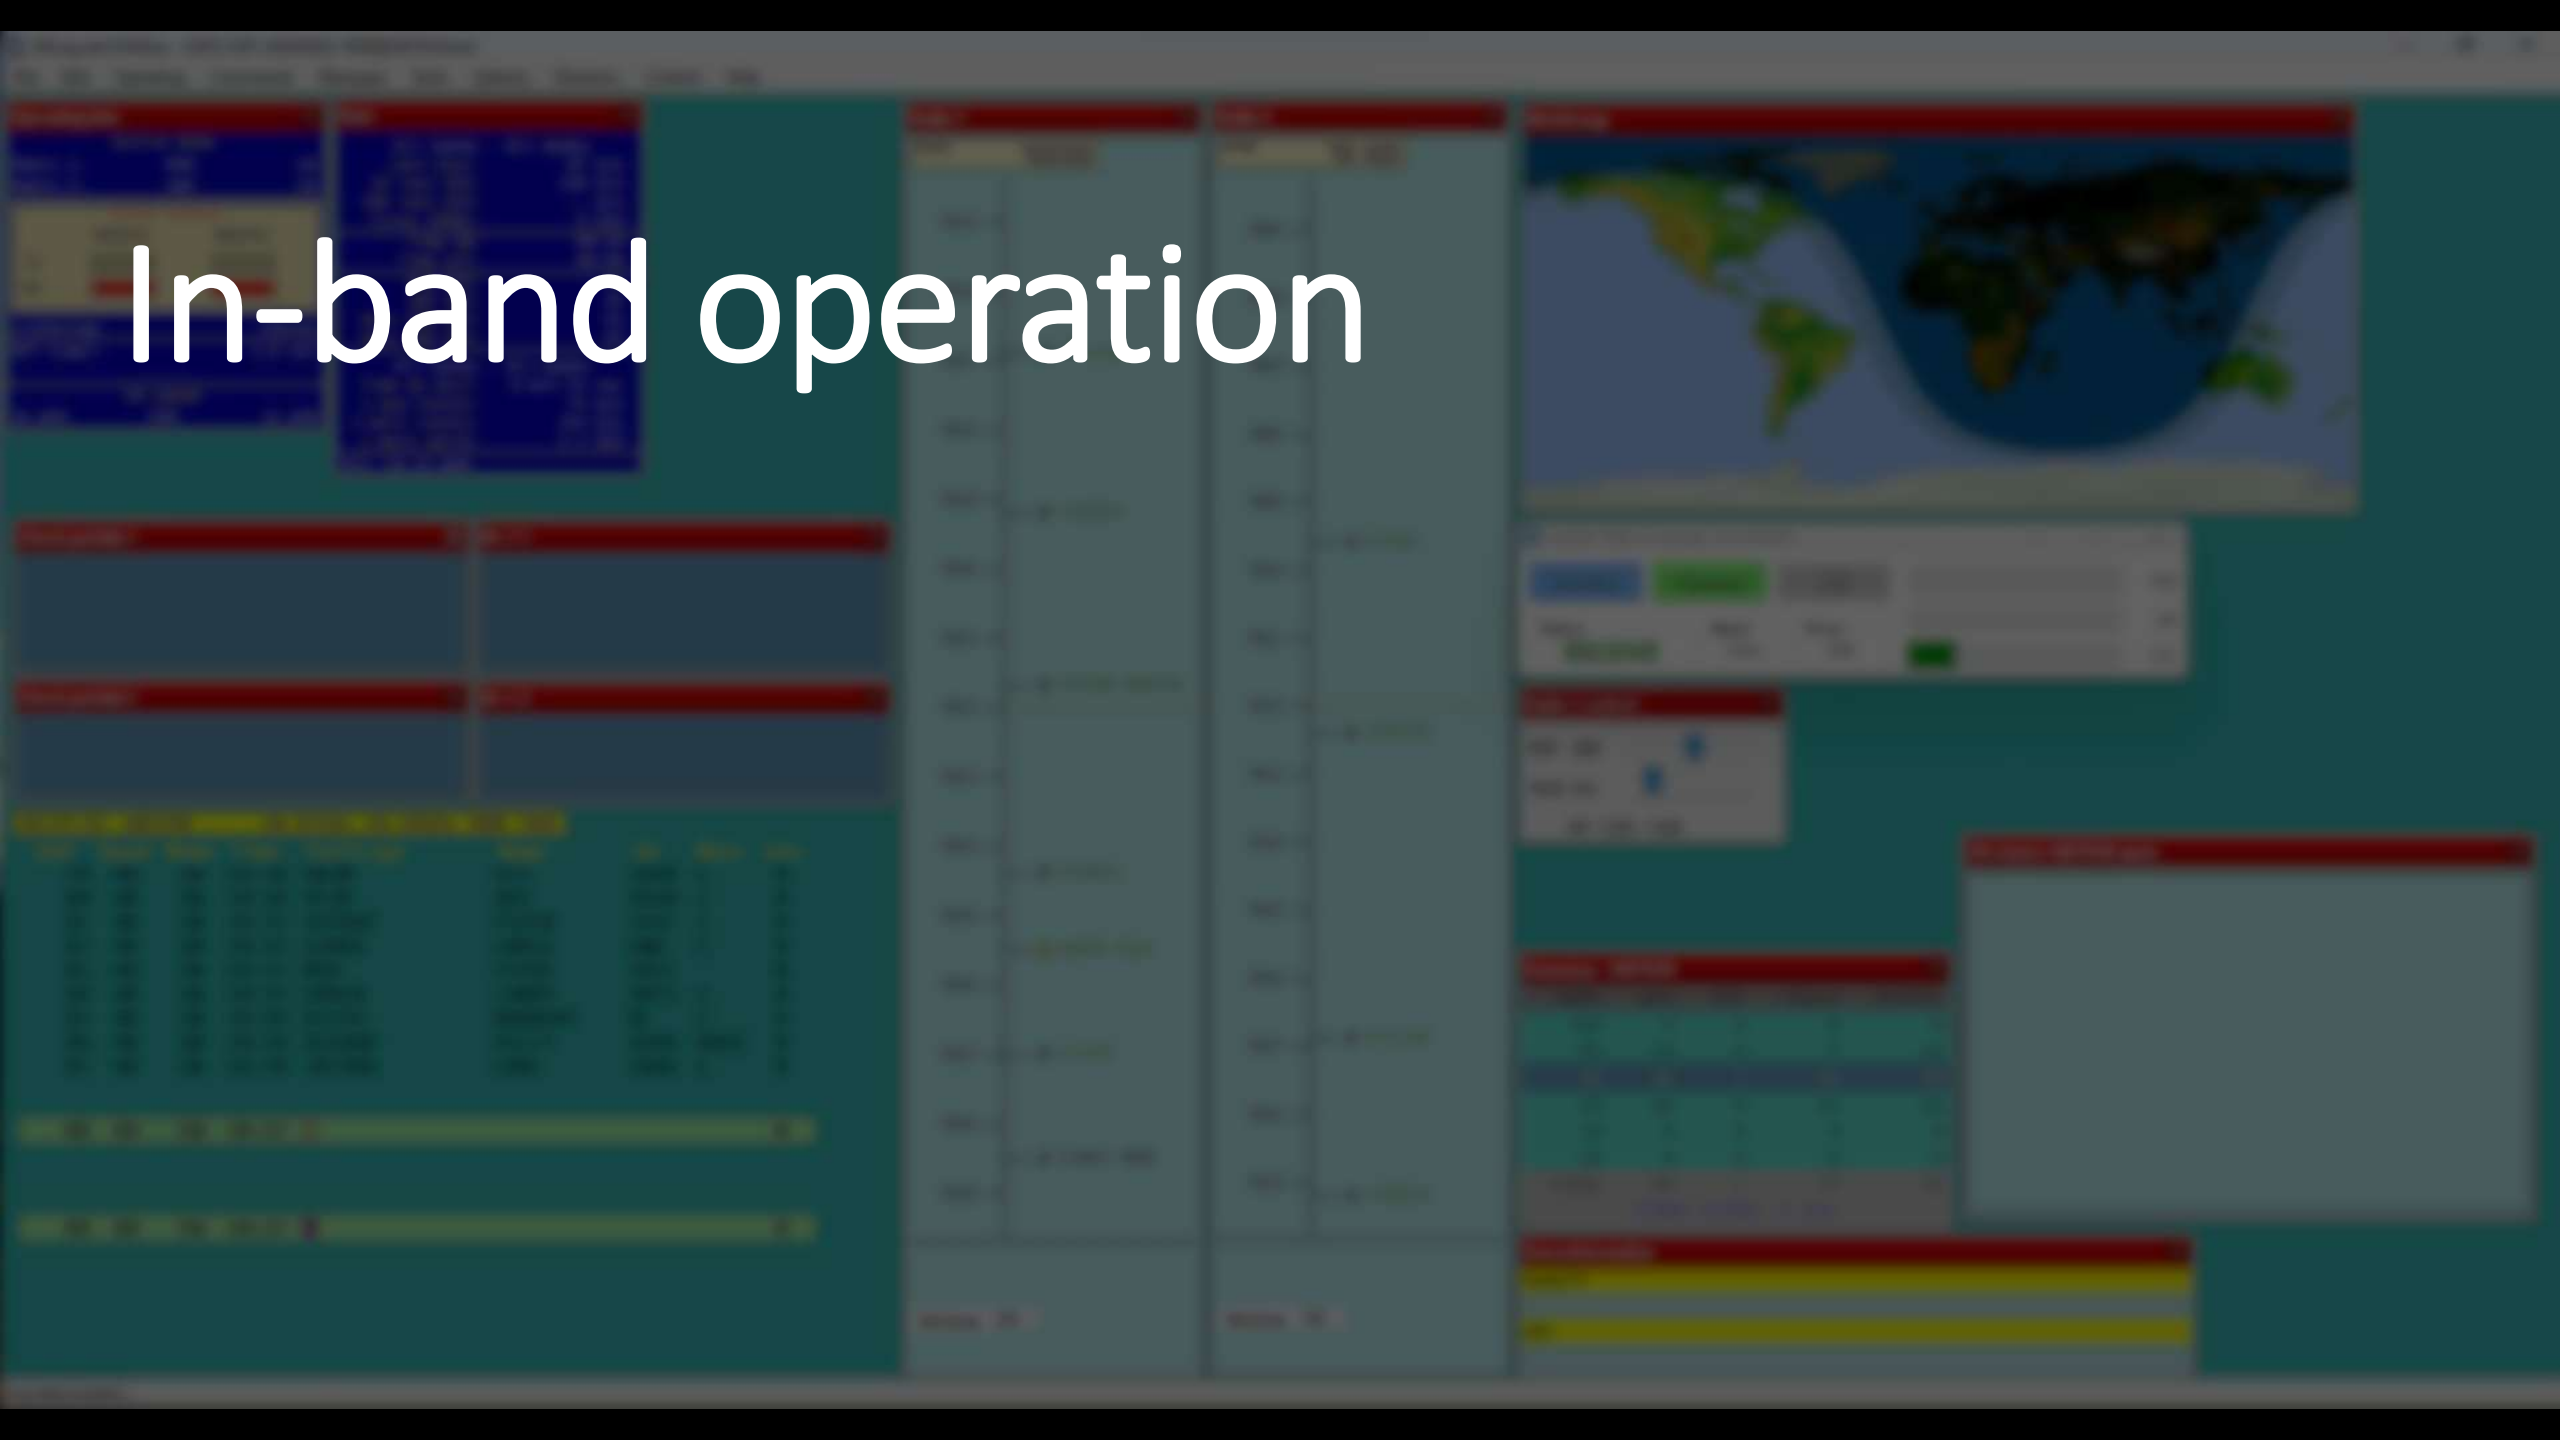


”In-band operation”

- Två radio och två operatörer på samma band
- Bara en sänder i taget
- Inband operation kräver
 - Separat lyssningsantenn med hög isolation mot sändarantennen
 - Hårdvara och mjukvara för ”interlock”


CQ World-Wide DX Contest regler

7. Only one signal on a band is allowed at any time. When two or more transmitters are present on the same band, a hardware device MUST be used to prevent more than one signal at any one time. Alternating CQs on two or more frequencies on a band is not permitted.


Enheter

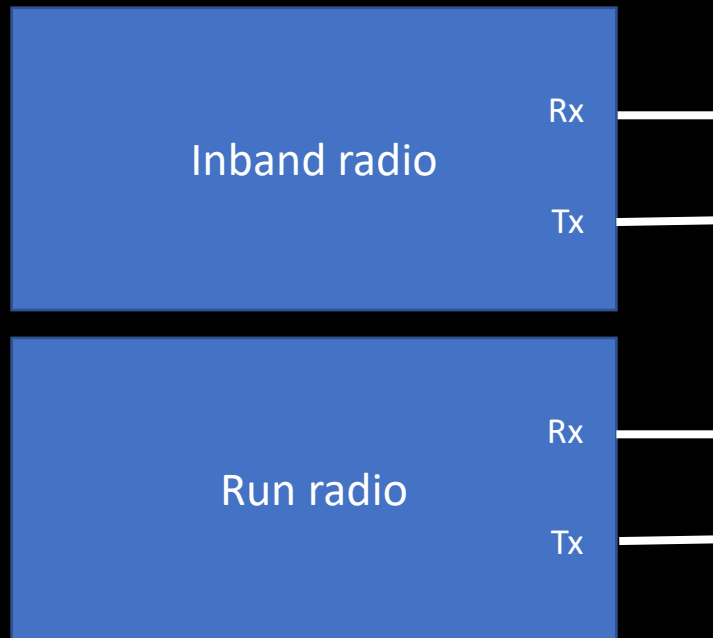


Bägge lyssnar

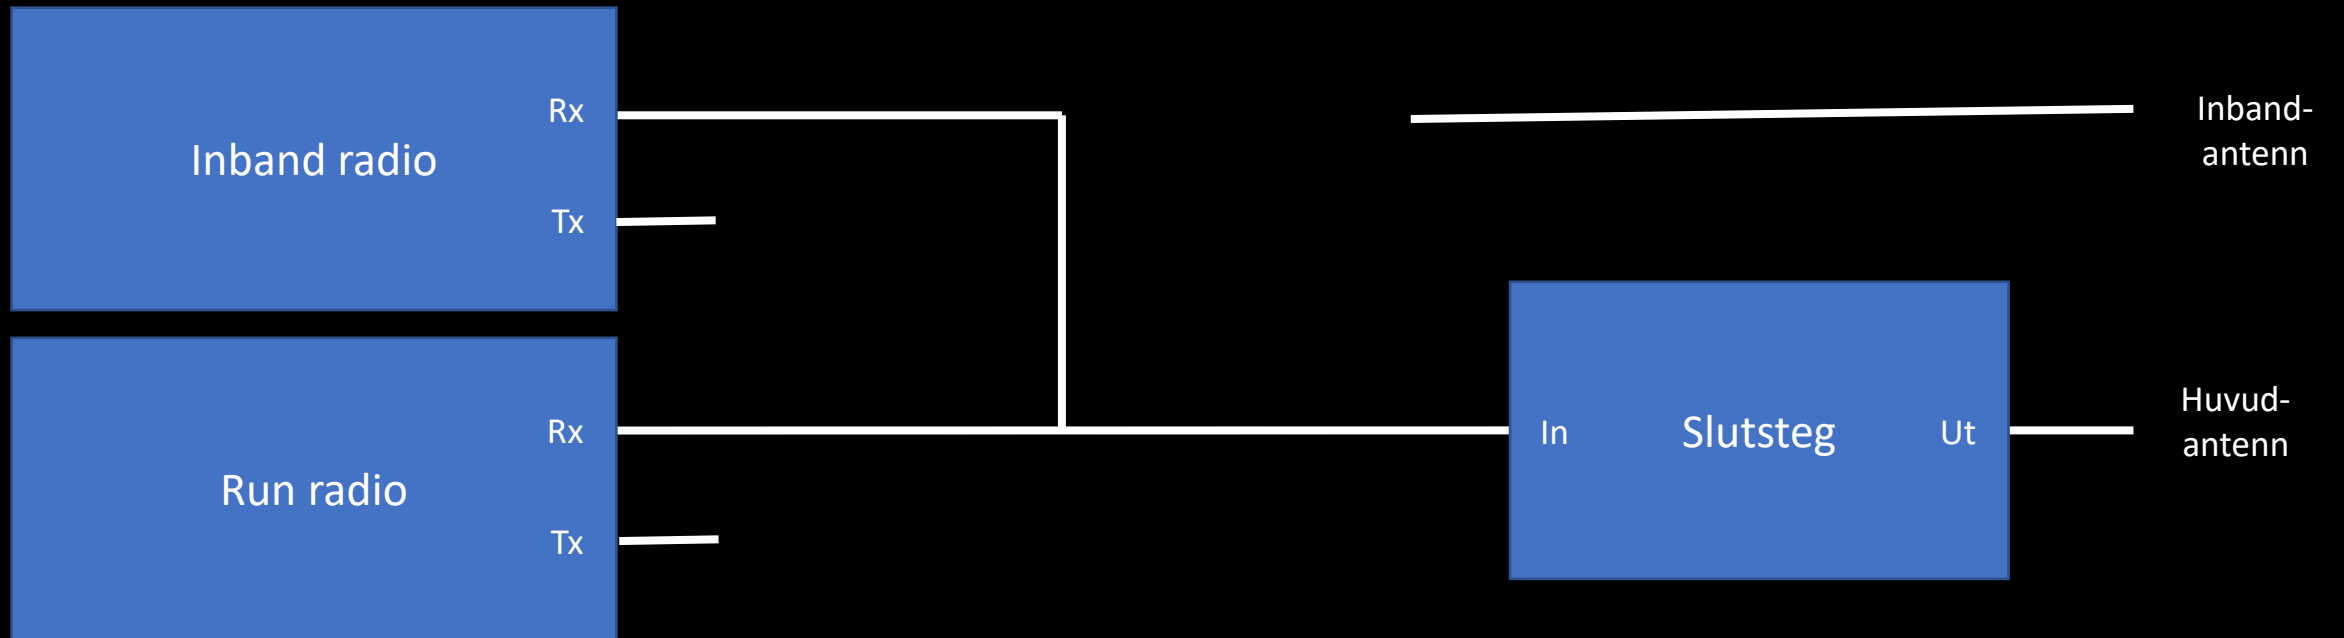

Run radio sänder

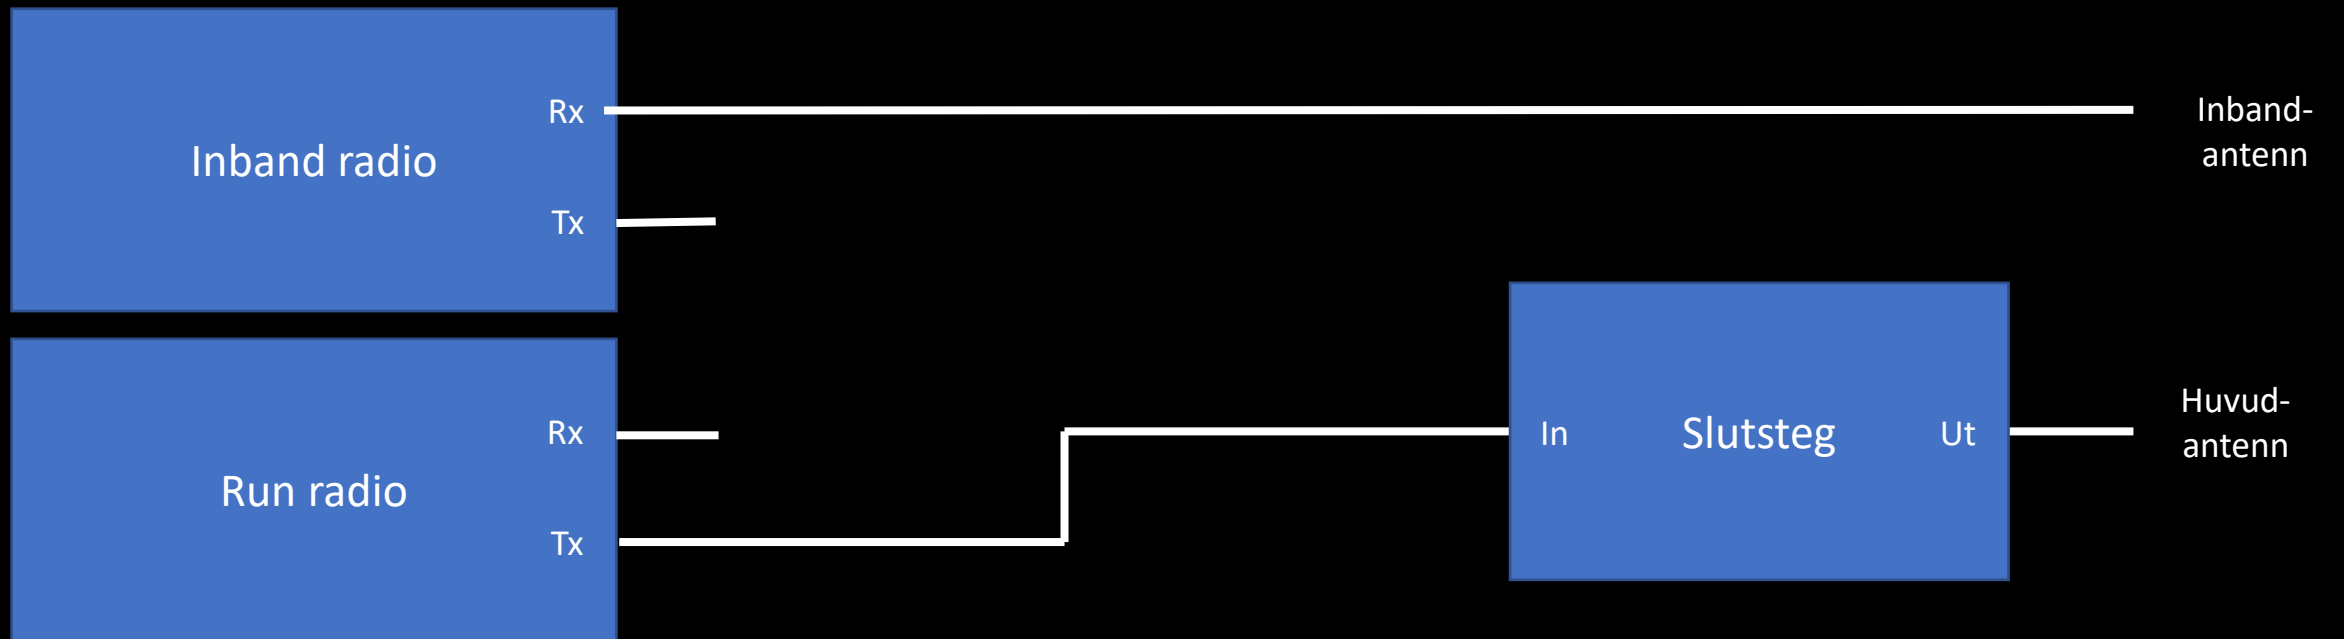


Inband radio sänder

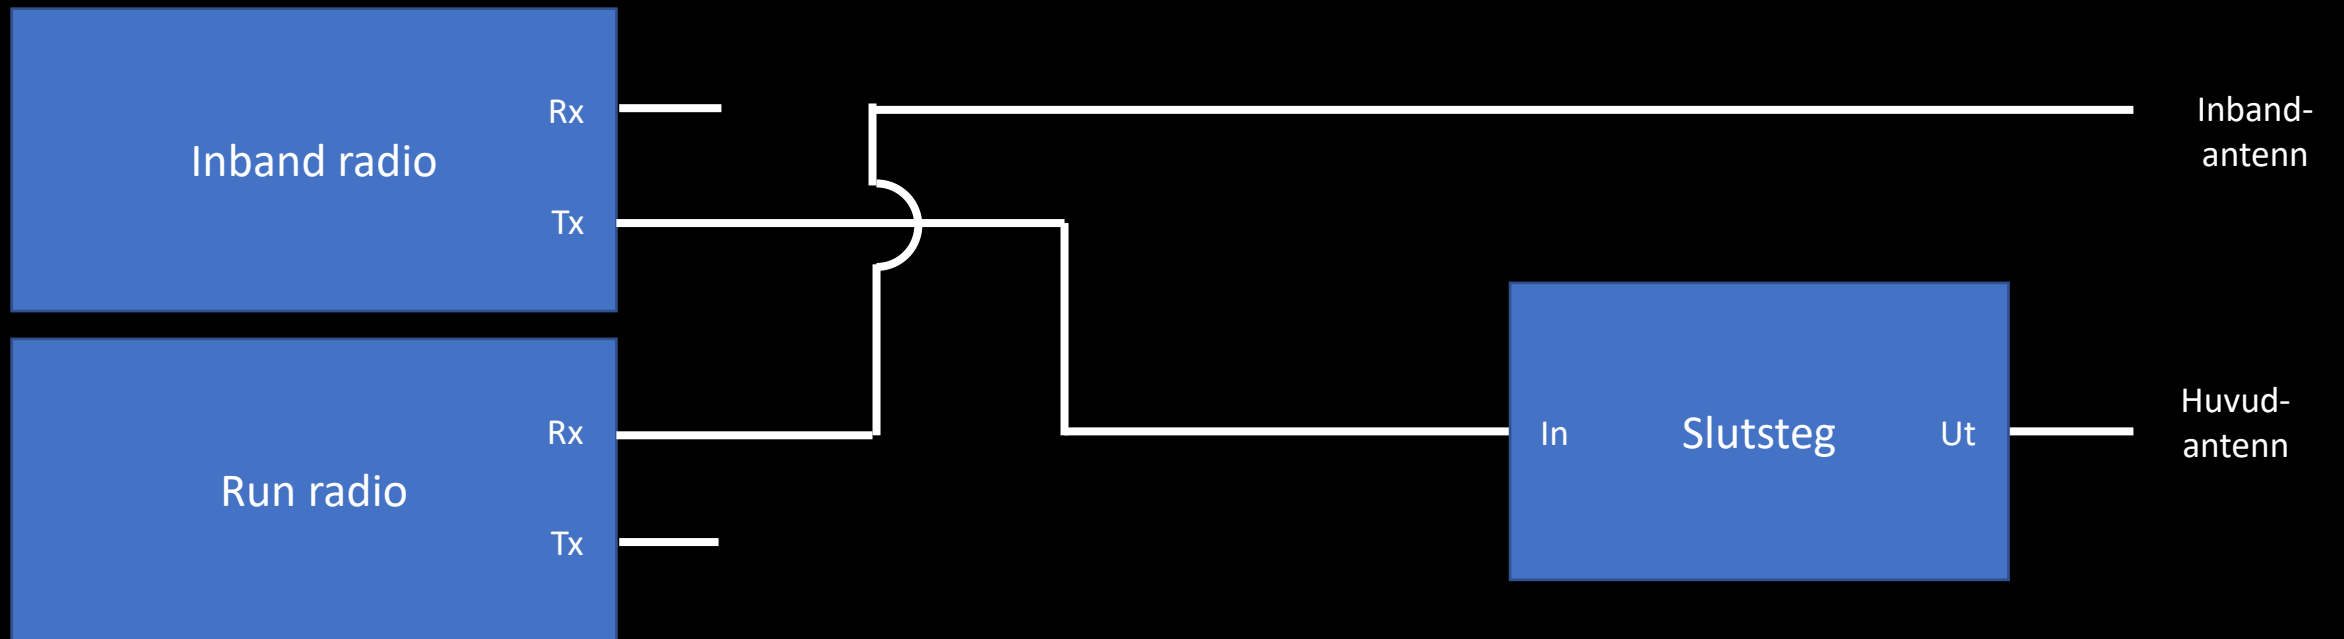


Kommersiella interlock



Bygga själv

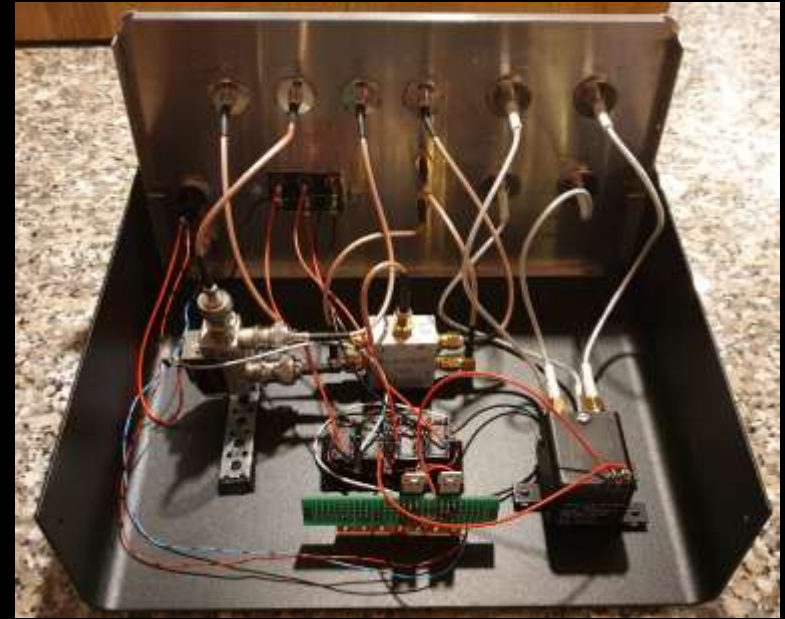

Lite mer komplicerat än man kan tro

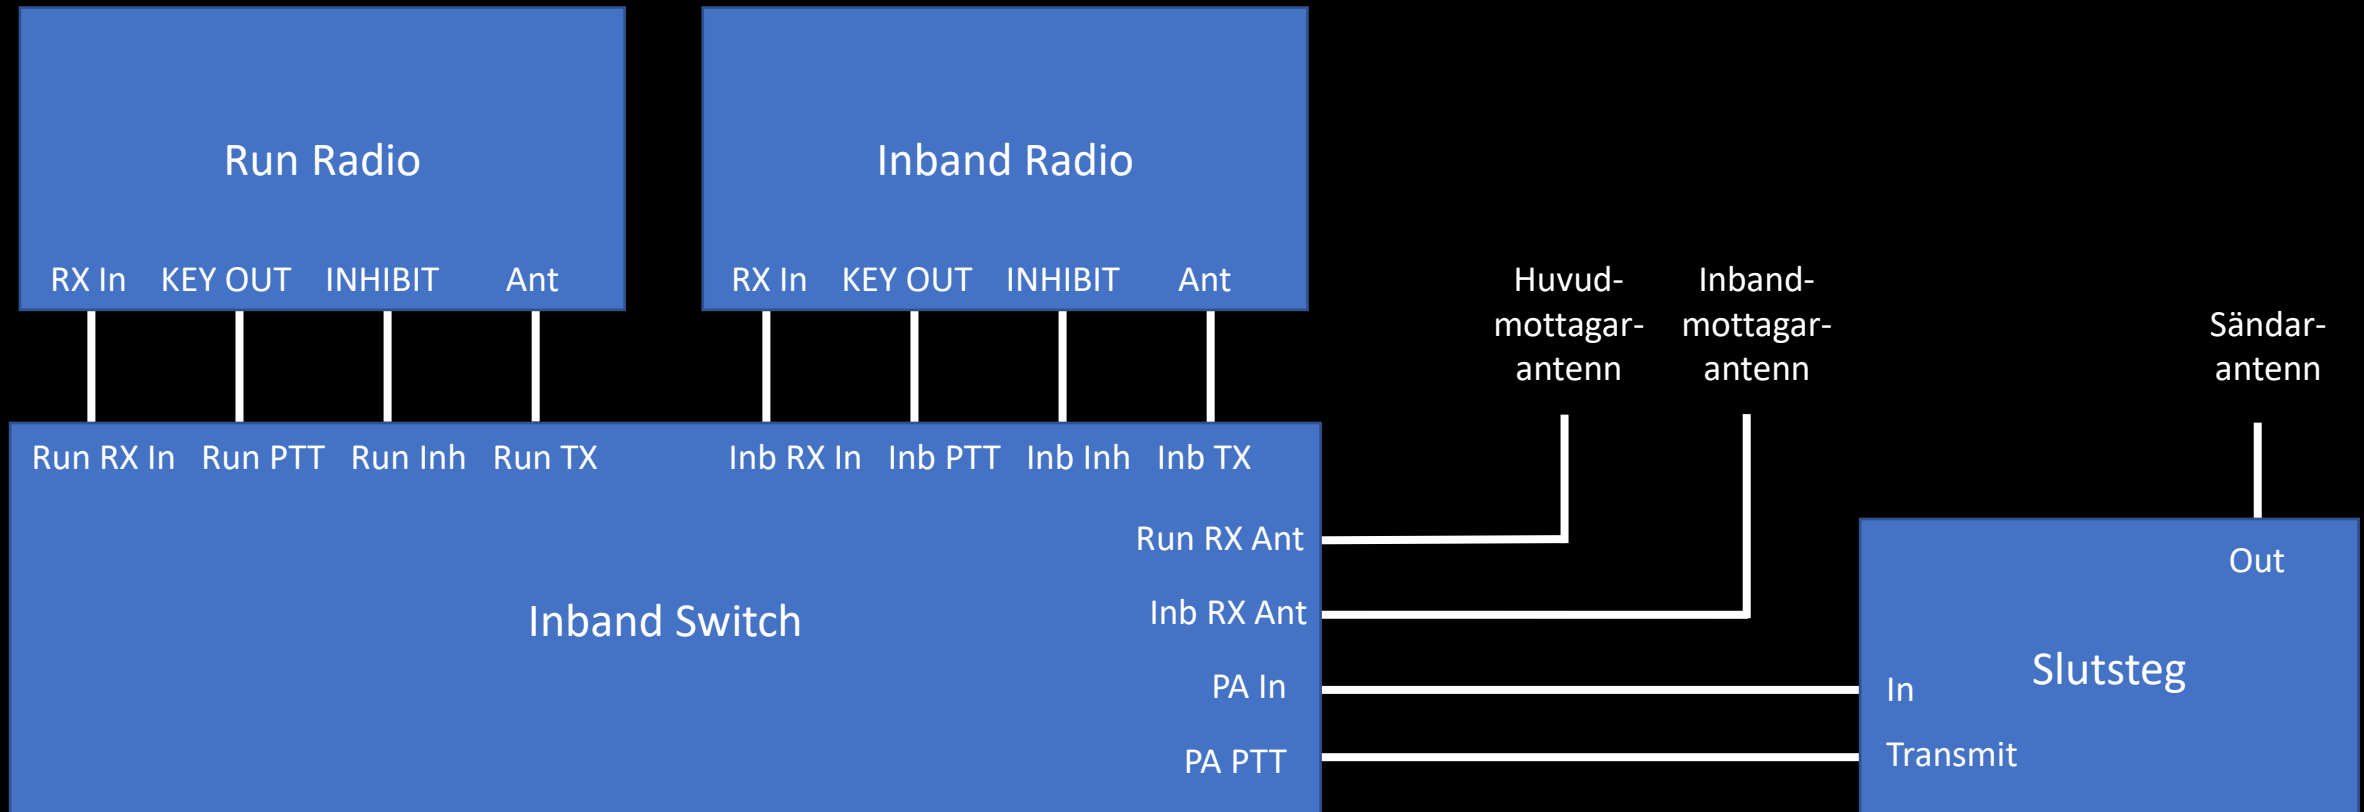

Testning



Interlock i DXLog

The screenshot shows the DXLog software interface. On the left, the 'Configure network' menu is open, showing options like 'Enable network', 'Networking', 'Broadcast', 'DX cluster', 'HamCAP', 'Data files', 'Statistics files', 'Log', 'Frequency allocation', 'Windows', 'Toolbar', and 'Reset window positions'. The 'Networking' menu is expanded, showing sub-options: 'Synchronize standard messages', 'Synchronize log', 'Block logging on this station', 'Use serial number server', 'Block logging if serial number reservation is unsuccessful', 'Block standard messages if band/mode change rule is broken', 'Show different active QSO line color during wait status', 'Block standard messages if no operator is logged on', 'Space key updates QSY Wizard', 'Enable interlock', 'Configure interlock', 'Interlock priority options', 'Announce QSO progress status in interlock', 'Optimistic interlock', and 'Allow other stations to abort sending'. The 'Interlock priority options' sub-menu is highlighted with a red box, and a red arrow points from it to the 'Interlock type' dialog box.

The 'Interlock type' dialog box is open, showing the following options:

- ☒ Same band from status list
- ☐ Same band and mode from status list
- ☐ Same station type from status list
- ☐ All stations from status list
- ☐ Custom stations ID(s) (multiple entries separated by ':')

The 'Interlock timeout' is set to 500 ms.

The 'Interlock priority options' sub-menu is also open, showing the following options:

- ☒ First one wins
- ☐ Last one wins
- ☐ Last one wins if message in progress is not
- ☐ Last one wins if message in progress is
- ☐ Message in progress selection

DXLog: Status i realtid

Network status ✕

STATION	OPERATOR	BAND	MODE	TYPE	RADIO	QSY	CALLSIGN	ID	MESSAGE
INBAND		160	CW	R	1800.0	OK			
RUN		40	CW	R	7032.8	OK	DL6KVA	INS	DL6KVA 5NN 14

Radio status ✕

RADIO

Network status ✕

STATION	OPERATOR	BAND	MODE	TYPE	RADIO	QSY	CALLSIGN	ID	MESSAGE
INBAND		40	CW	R	7022.1	OK	3D2KK	F2	5NN 14
RUN		40	CW	R	7032.8	OK			

Radio status ✕

RADIO
Blocked by INBAND Msg: F2

Tips

- Allra viktigast: Inband är ett samspel, träna ihop
- Korta meddelande är bättre än långa, ENN A4 är kortare än 5NN 14
- Använd avbrott (Shift – Escape) med omdöme
- Kom överens om handsignaler






Att flytta en multiplier



”Flytta multiplier”

- Be en station QSY till ett band där man behöver multiplikatorn
- Mest relevant för multi-operator
 - Multi-multi och Multi-two – skicka stationen till operatören på det andra bandet
 - Multi-one – skicka stationen till multi-operatören
- DXLog erbjuder
 - Semi-automatisering av förfrågan
 - ”QSY wizard” som visar om det är lönt
 - Meddelande till mottagande operatör

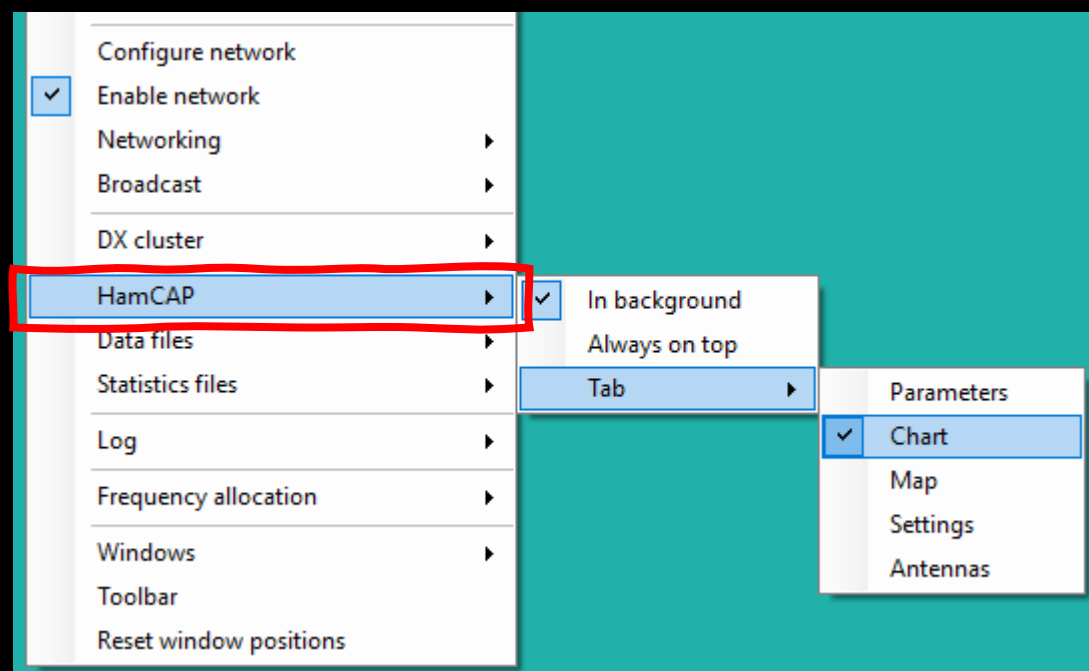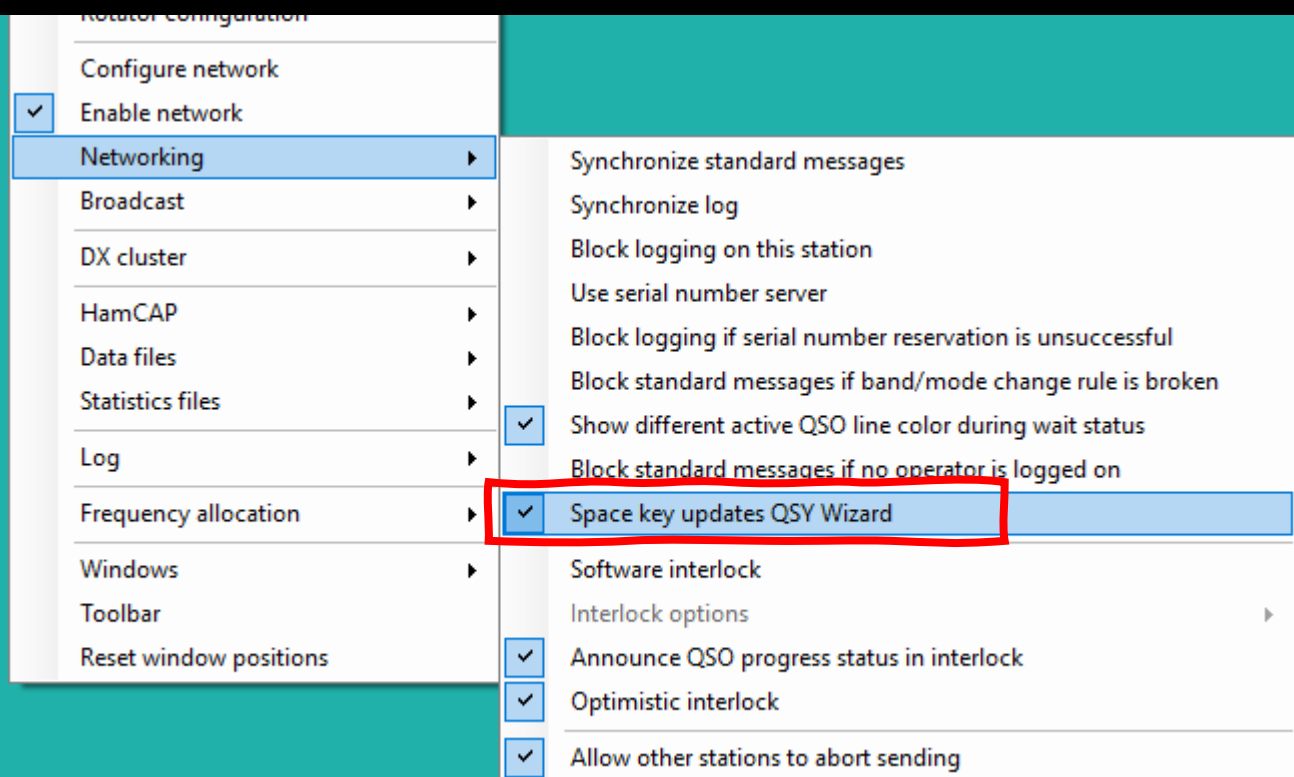

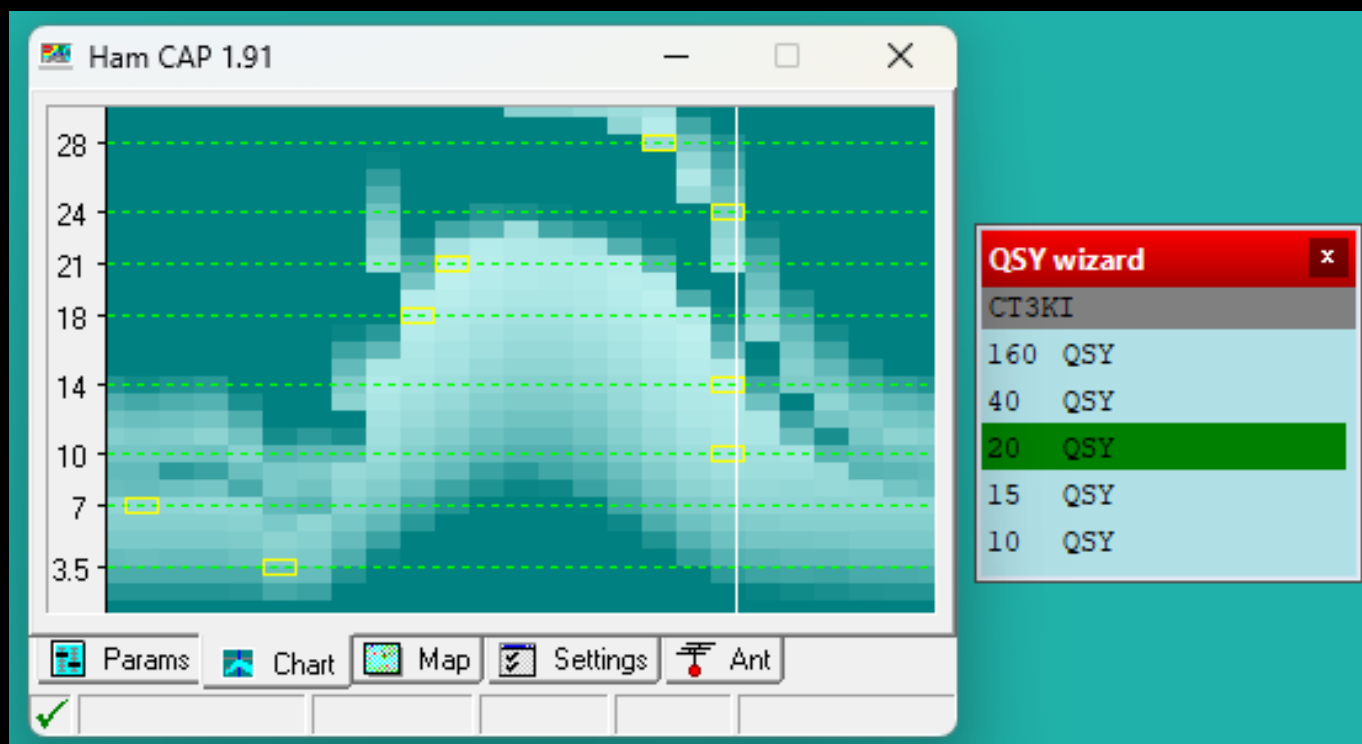

TEST SC7DX

CT3KI

CT3KI 5NN 14

5NN 14

Alt-D

F1

R PSE QSY 20?

F2

OK QSY 14033 14033

F3

TU

QSY wizard

CT3KI	
160	QSY
40	QSY
20	QSY
15	QSY
10	QSY

11 40 CW 05:15 CT1KI 599 599 14 R

* NEW MULTIPLIER *
ALSO NEEDED: 20(14033)

Pass a station

Call sign: CT3KI Time: 1805 ☐ +24h Save

Frequency: 14033.0 CW Comments:

Help

Band: 20 Mode: All Station: STATION_C

Radio 1 = 14033.0 Radio 2 = 14021.9

Messages

QSY? R PSE QSY \$PASSBAND? F1

QSY Freq OK QSY \$PASSFREQ \$PASSFREQ F2

TU TU \$CR F3

Save messages definition

☒ Send alert when passing

Gab

[18:06] STATION_A: Passing CT3KI to 14033!

SO2V – Bli mer produktiv med en enkel station

Inband – Bli mer produktiv med en avancerad station

Flytta multipliers – bli mer produktiv i multi-operator

DXLog

- Ett loggprogram för contest
- Gratis
- Ständiga förbättringar
- Över 480 tester
- Lätt att komma igång
- Omfattande dokumentation
- Onlineforum för support
- <https://dxlog.net>


DXLog.net - Contest logger

Welcome to the home of DXLog.net, the ham radio contest logging software by 9A5K.


The software is free of charge, donated to the ham radio community by Krassy K1LZ and a small team donating their time and effort.

Please use the support forum at groups.io for bug reports and questions.




[DXLog supports over 480 contests, click for list](#)






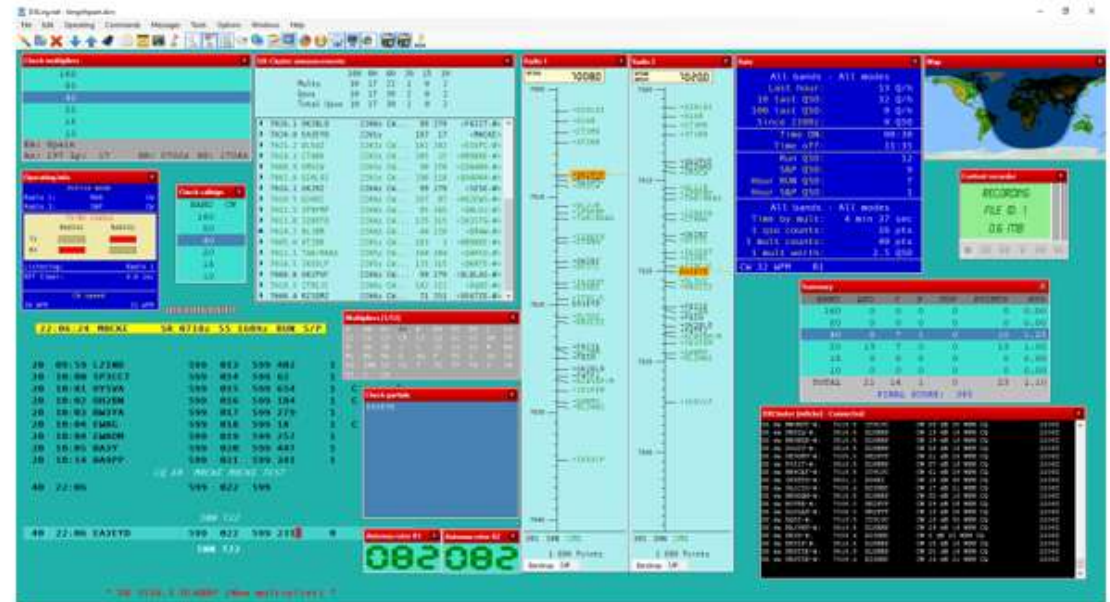


[Download](#) [Documentation](#) [Release notes](#) [Support](#) [Support archive \(read-only\)](#)

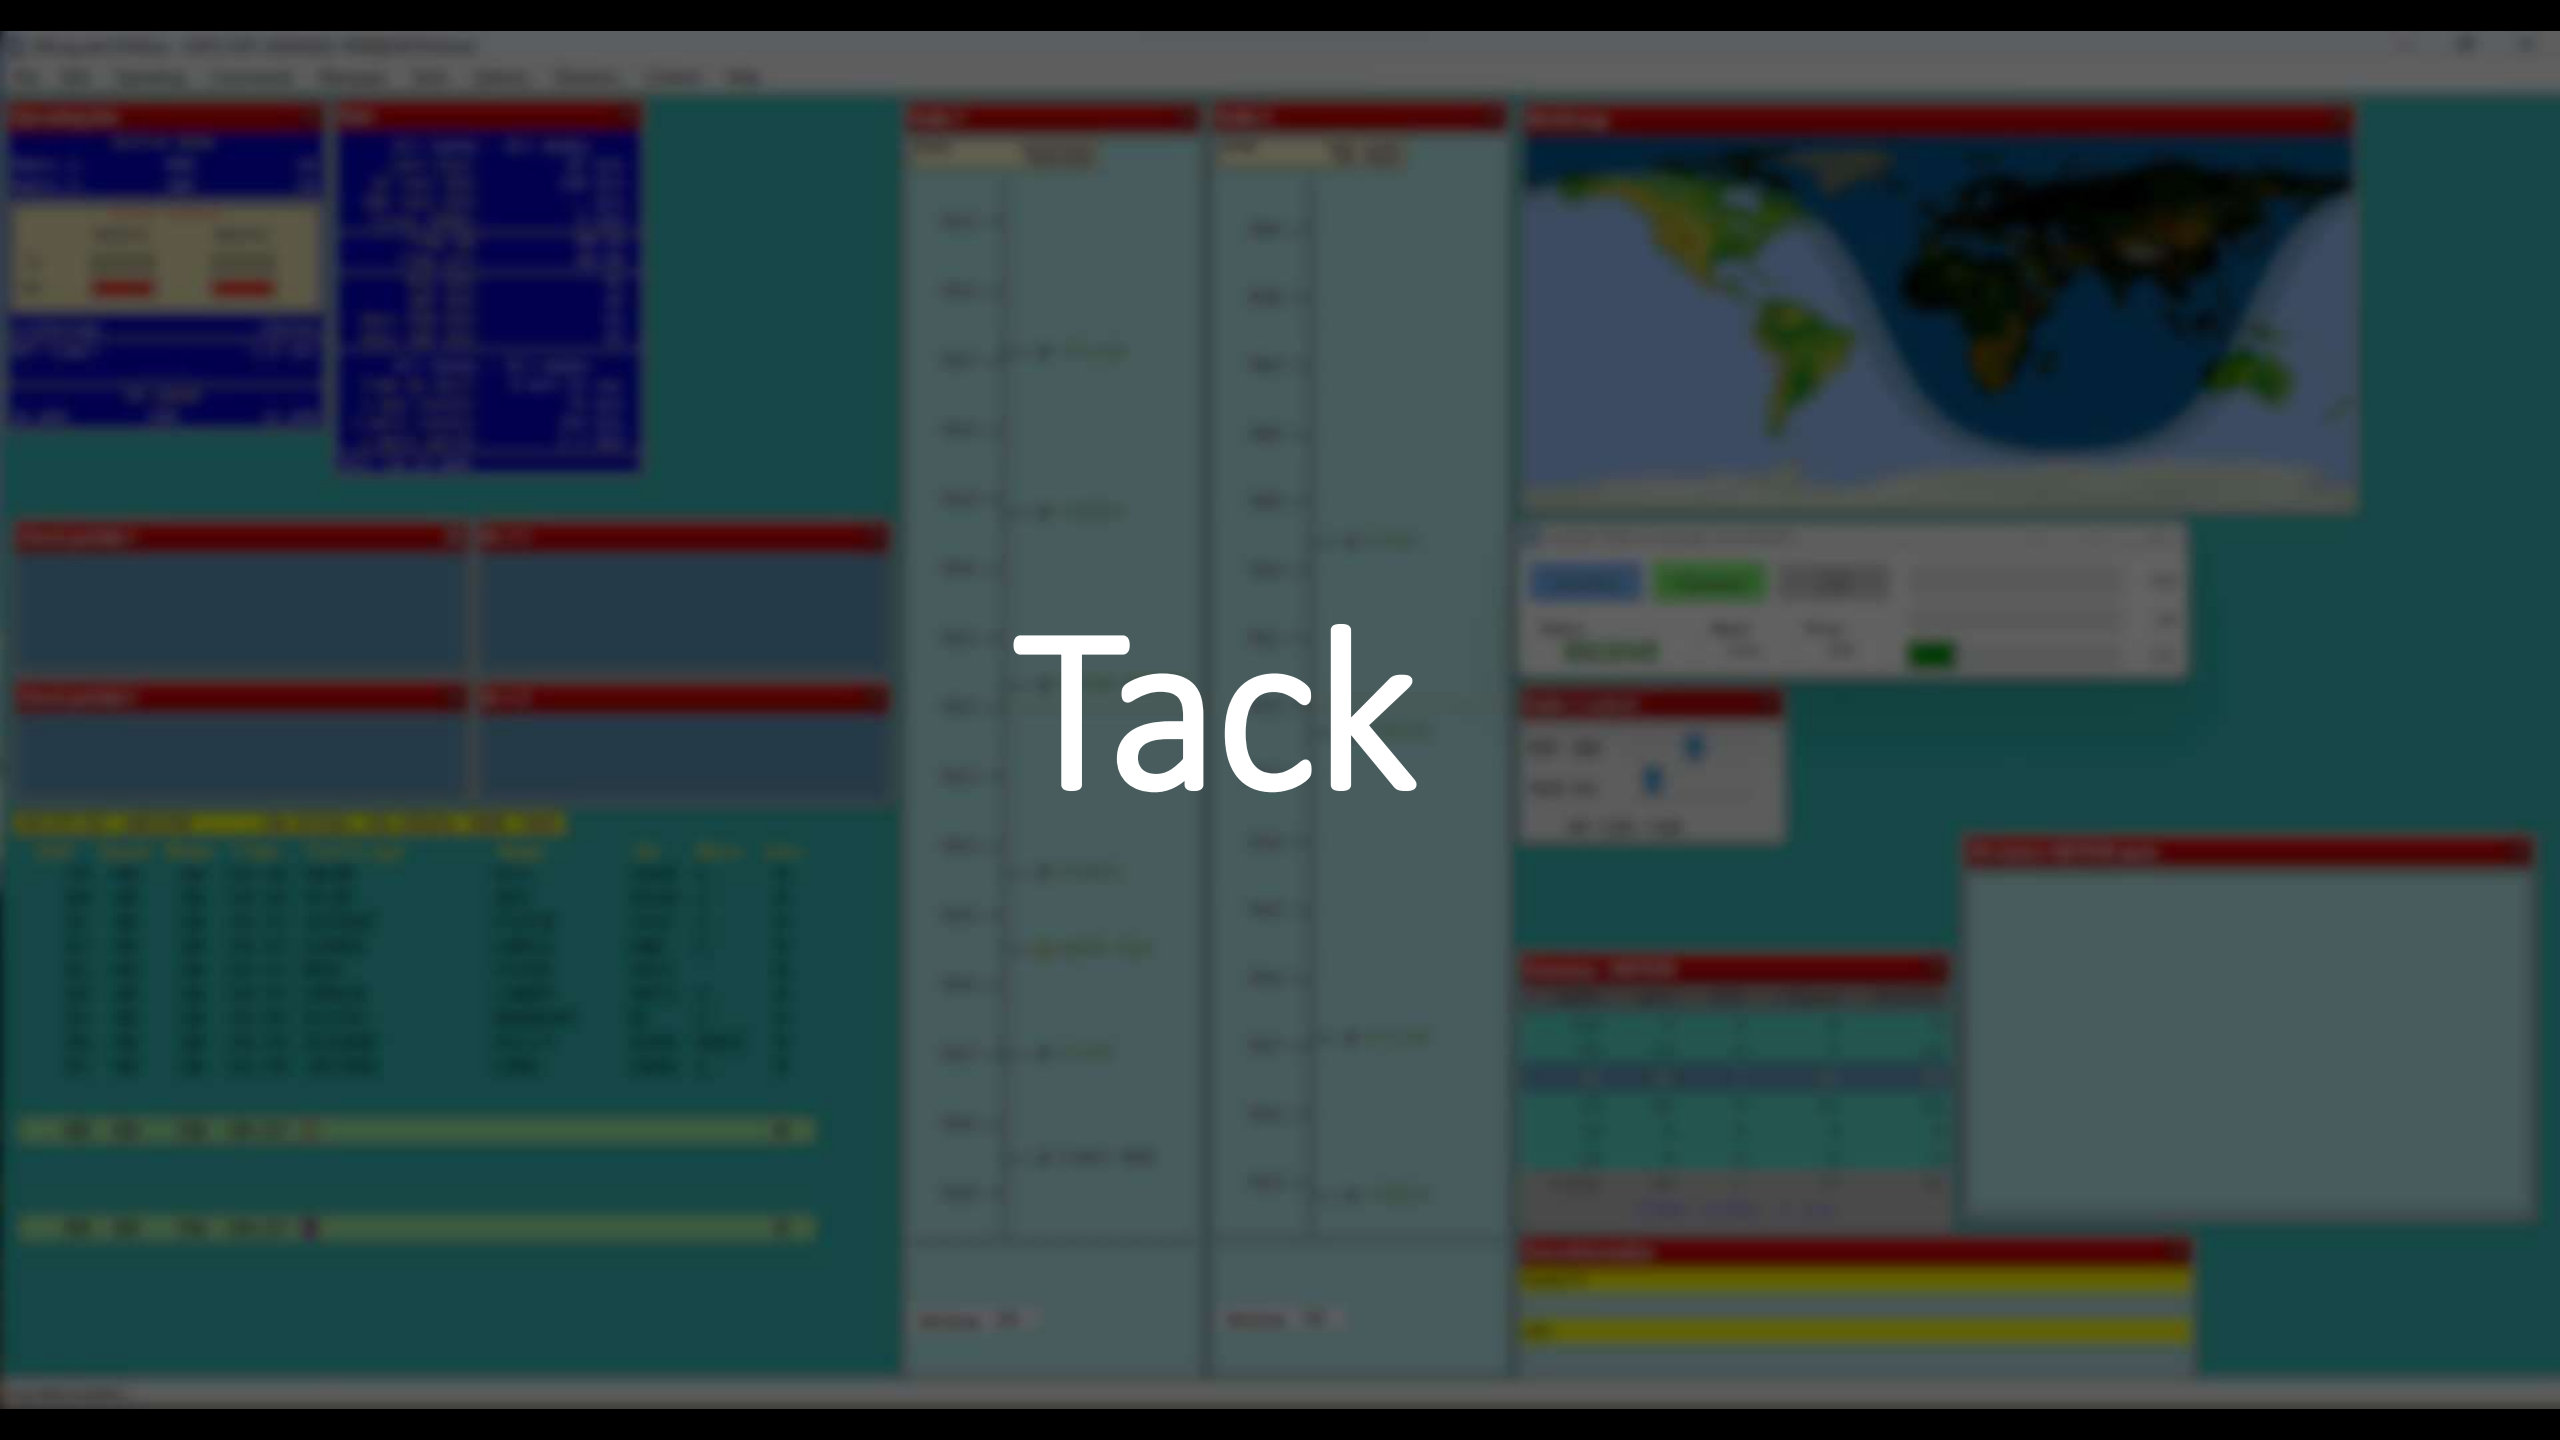

Tack

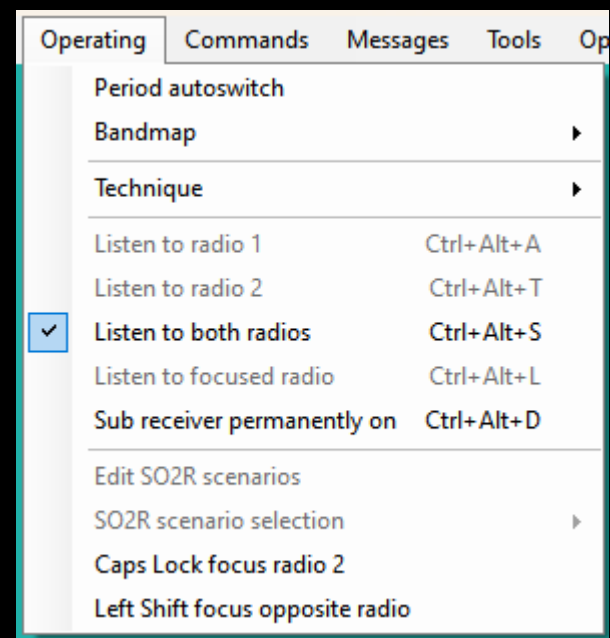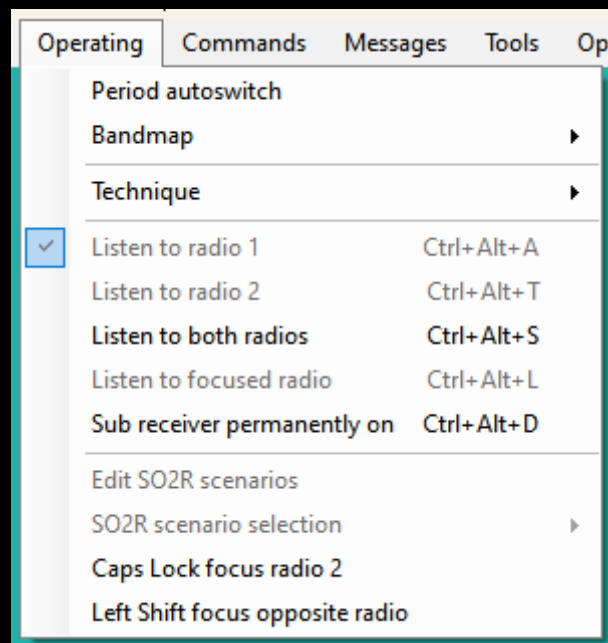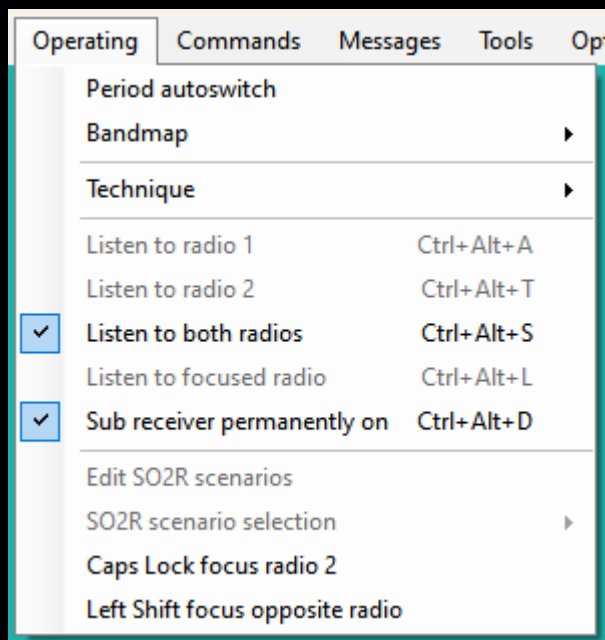


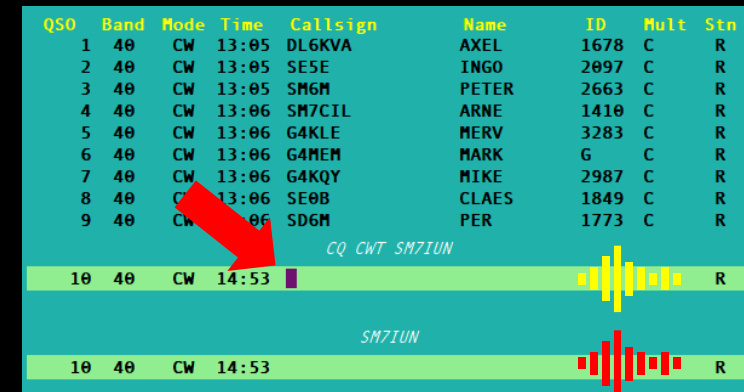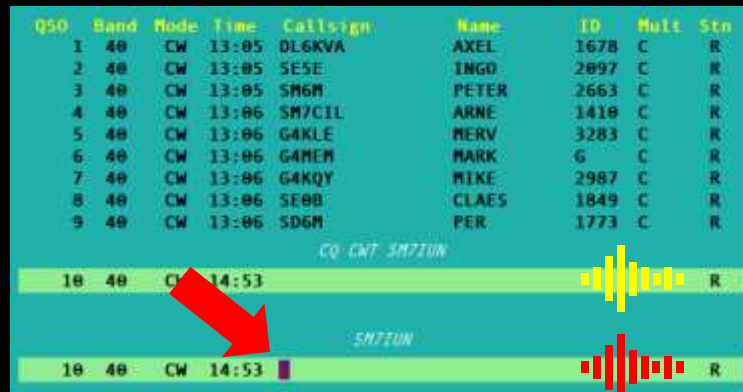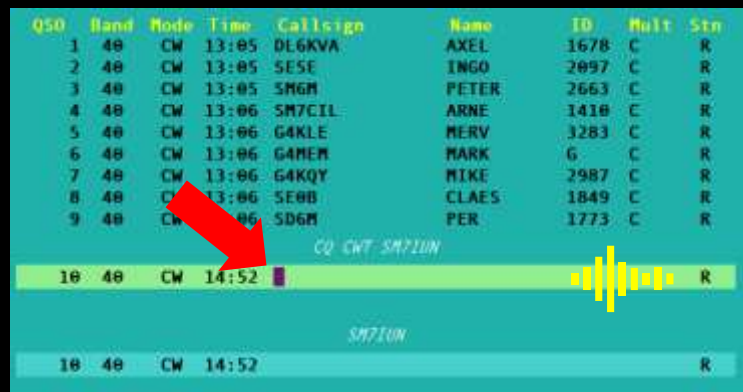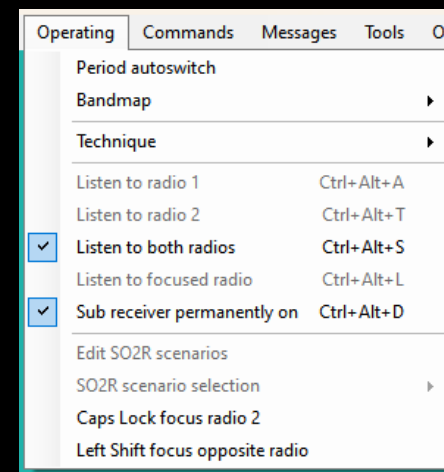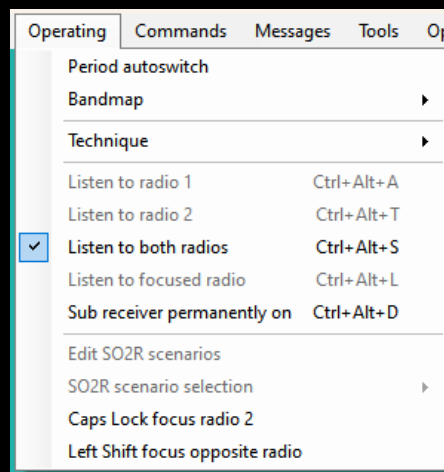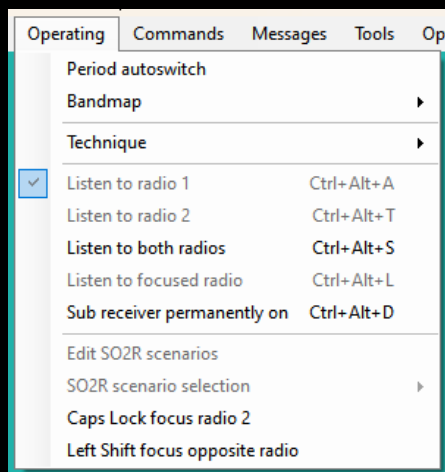


- This operating mode allows you to use the radio's two VFO almost as if having 2 separate radios.
Important: SO2V only works for Radio 1 in the Options|Configure interfaces panel.
Depending on their CAT command repertoire this is implemented using either VFO selection or swapping on single receiver radios.
- For dual receiver radios, the SO2V mechanic based on using SPLIT should be used.
In this case the option Options|Interface specific options|Dual receiver radio (Use split in in SO2V) must be enabled.
- On selected radios, such as dual receiver ICOM radios, VFO knob focus will follow DXLog's focus.
On selected radios, sub receiver on/off control is also supported.
- In SO2V with SPLIT on such radios, two of the audio control menu entries above plus two additional shortcut keys are available for sub receiver control.
- [Ctrl][Alt][S] toggles the sub receiver on and off when radio 1 is focused.
- [Ctrl][Alt][D] toggles the sub receiver to be permanently on or switch on and off with focus.
- Important: On many keyboards [AltGr] can be used instead of [Ctrl][Alt].
- Although not on the level of SO2R, SO2V can be a quite efficient operating mode.

- Tips for the beginner
- Train in receiving with both receivers enabled.
- You will typically have your Run frequency on the main VFO (left ear) and do S&P on the sub VFO (right ear).
- Remap the Toggle subreceiver key to a more accessible key.
- When getting used to SO2V you will find yourself frequently switching the subreceiver on and off while focusing the main VFO. Since keyboard layouts vary greatly, a generic key, [Ctrl][Alt][S] is assigned to this function. This is also in line with its function in SO2R.
A popular key to redefine for this is the one directly to the left of "1".
This is ` on English language keyboards and \$ on most European ones.
Use Tools|Redefine keyboard keys to do this.
- Use the "rapid CQ" key. In SO2V, [Shift][Ctrl][F1] switches focus to radio 1, shifts to Run, and sends CQ. Since it is common practice to Run on the main VFO and S&P on the sub VFO, this is a very convenient key. Many redefine [F1] to mean this key.
- Use the "Equalize VFO" key. [Ctrl][F4] sets the unselected VFO to the same mode and frequency as the selected VFO. This is a very convenient way to synchronize the two VFO when switching band or just doing S&P.
- Use the "Switch focus" key as alternative to [Up] and [Down]
[Keypad Multiply] toggles transmit and entry focus between the two VFO.
- Use the "Switch VFO knob focus" key.
[Keypad Divide] switches the VFO knob focus on supported stations (such as recent dual receiver ICOM and Yaesu radios) allowing you to tune around the band looking for S&P opportunities on the sub VFO while calling CQ, keeping entry and transmit focus on the main VFO.
- Consider using the "Swap VFO" key.
[Alt][Keypad Multiply] swaps the frequency and mode of the two VFO.
Since the main VFO is typically the Run VFO, there may be situations when this is helpful.
- Make band shift keys change both VFO
The option Options|Interface specific options|Band change keys affect both VFO makes band changes with [Alt][F1]/[Alt][F2] change the band of both the main and the sub VFO in tandem. This saves a lot of key presses and also reduces the risk of accidentally transmitting on a band which your PA and antenna is not currently set for.


Bägge lyssnar

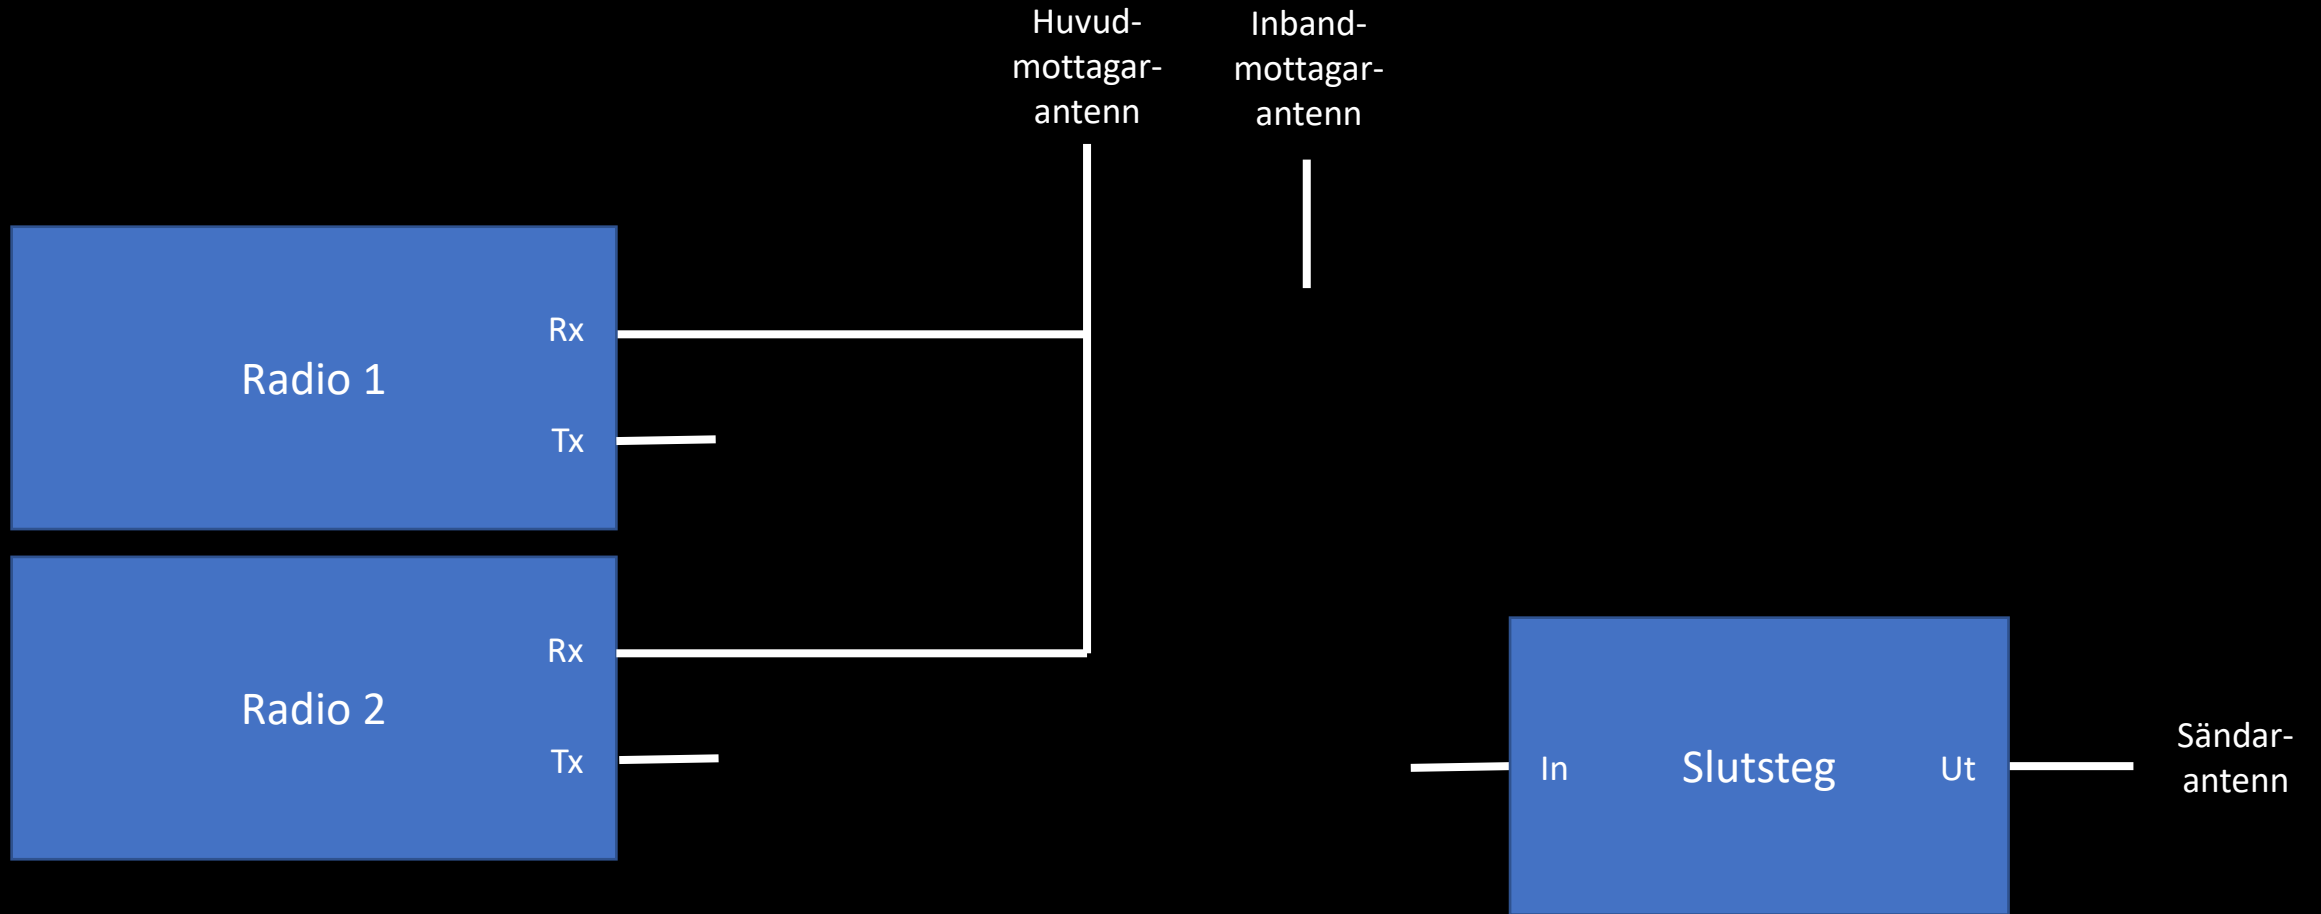

Bägge lyssnar

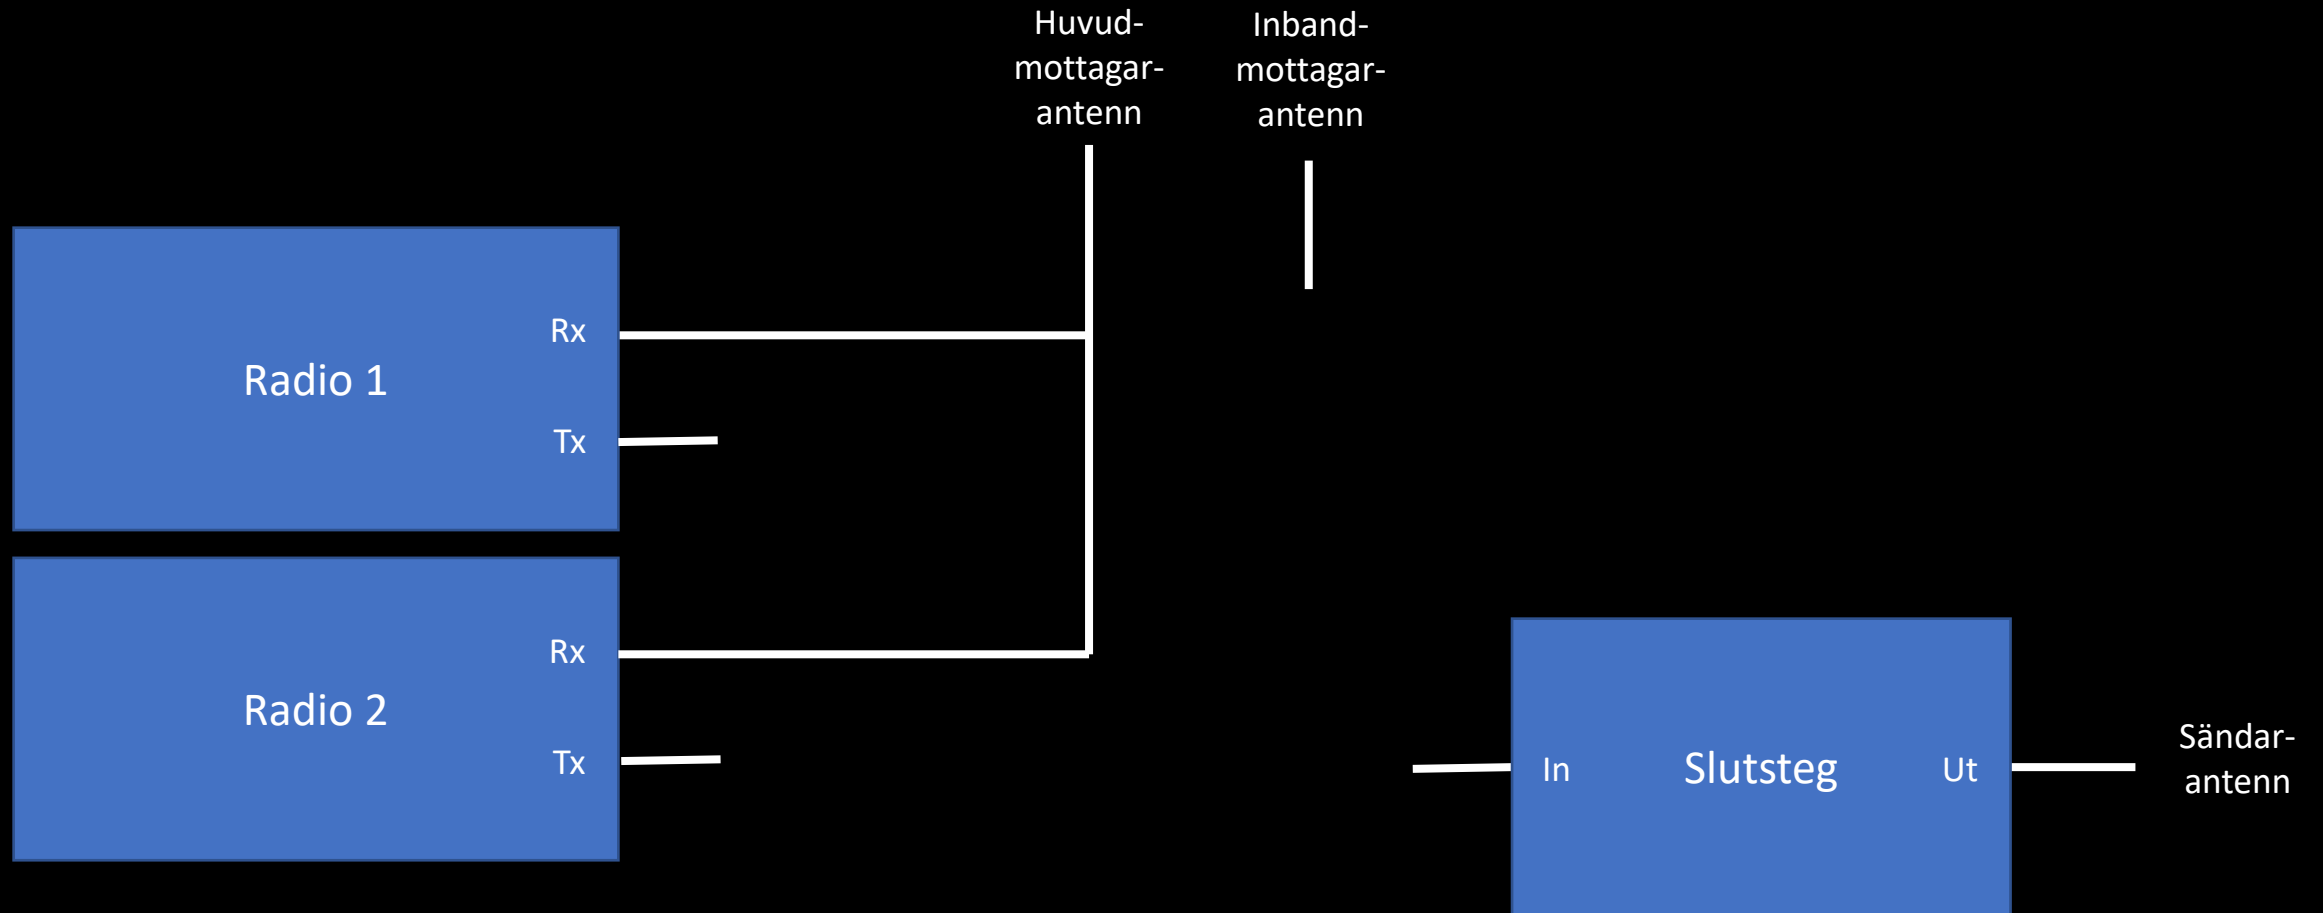

Radio 2 sänder

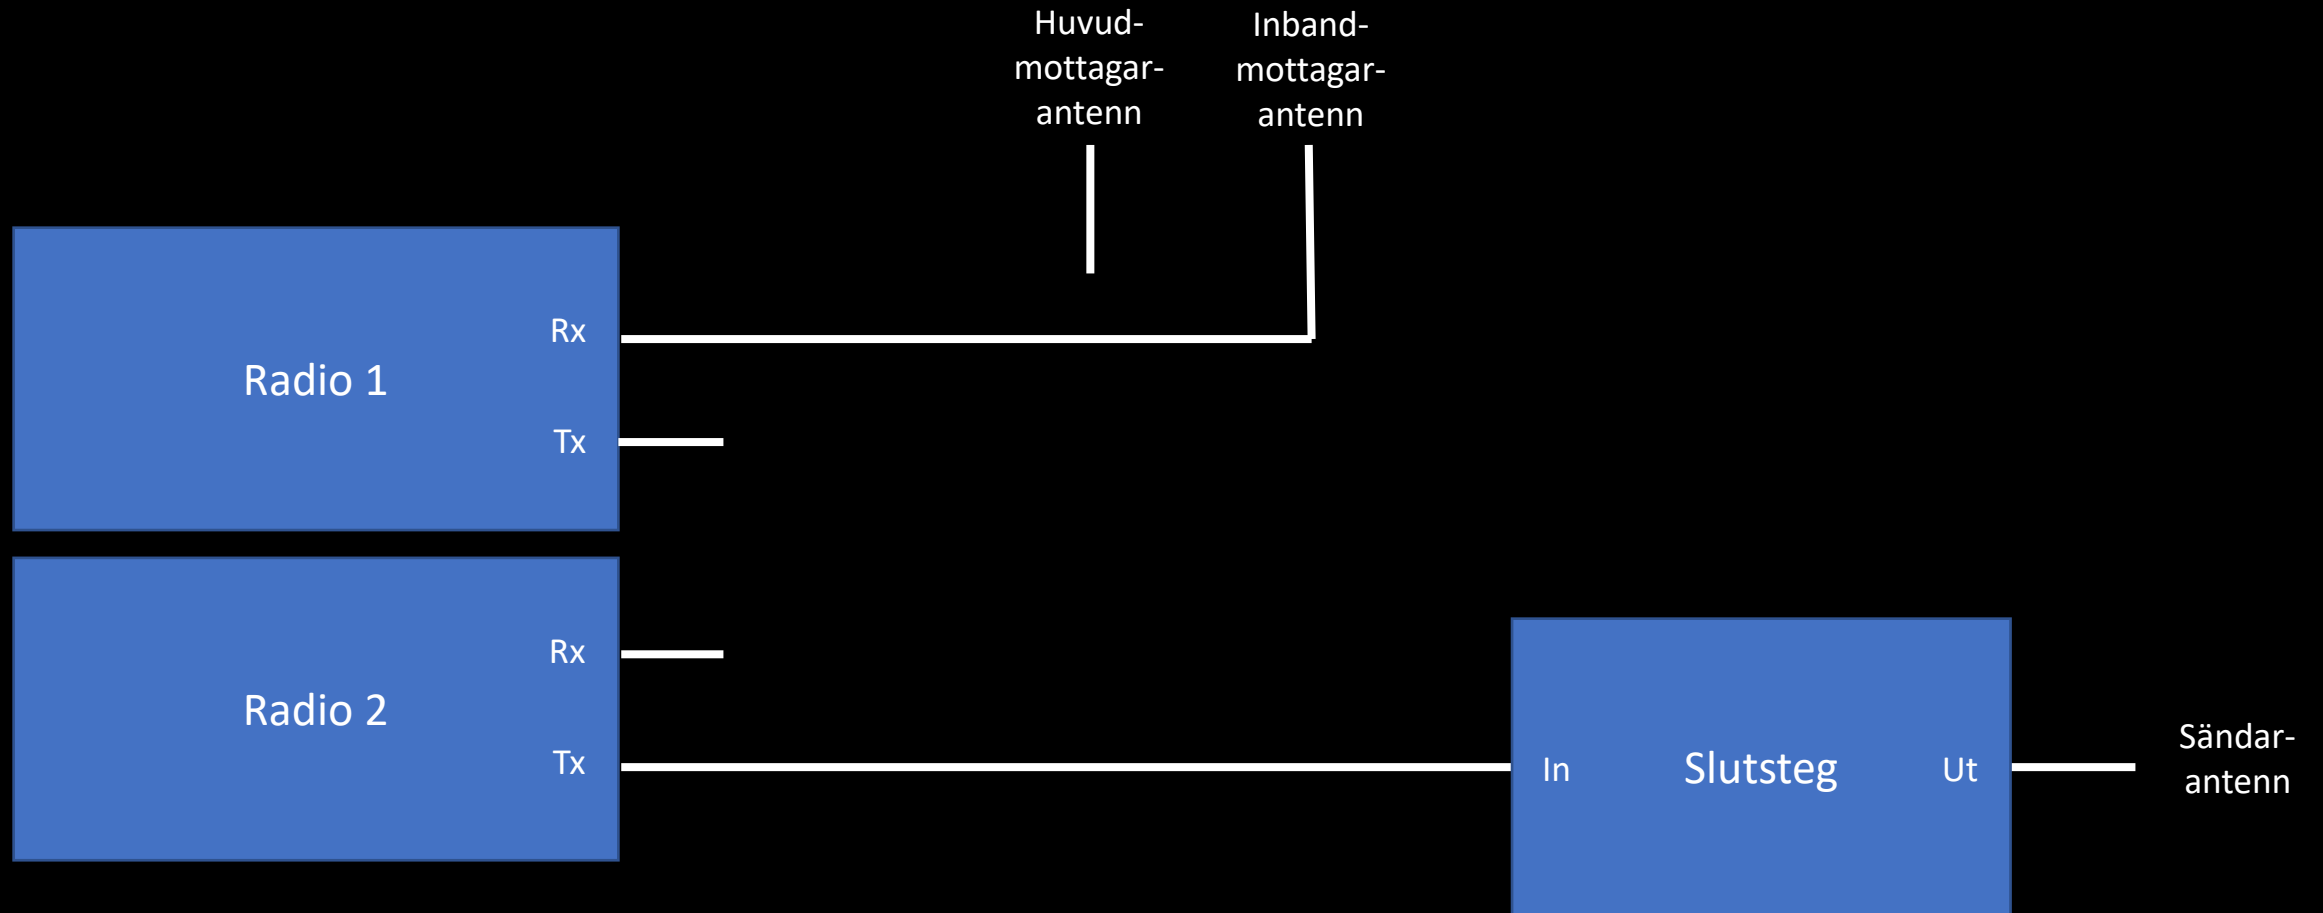

Inband sänder

