

# N9EWO ICOM IC-7300 "SPECTRUM SCOPE" Adjustments

*(using Steve Ellington N4LQ data as a base, but is not exact)*


## NO-FILL SPECTRUM SCOPE - WATERFALL CHANGES

Access "Spectrum Scope" Settings Menu : (press and hold) " EXPD / SET " (change settings below , all others are left at default)

PAGE	ITEM	DEFAULT	** NEW SETTING **
1/4	Max. Hold	10s Hold	OFF
1/4	Center Type Display	Filter Center	Carrier Point Center (ABS Freq)
2/4	Averaging	OFF	4
2/4	Waveform Type	FILL	FILL + LINE
2/4	Waveform Color (current) [FILL COLOR]	R : 172 G : 191 B : 191	R : 0 G : 0 B : 0
3/4	Waveform Color (line) [LINE COLOR]	R : 56 G : 24 B : 0	R : 0 G : 255 B : 0
3/4	Waterfall Display	ON	OFF
4/4	Waterfall Size (Expand Screen)	Mid	* Small
4/4	Waterfall Peak Color Level	Grid 8	Grid 4

Important Note: Be sure that the "VBW" (page 2/4) is selected on NARROW also located in the "scope set" menu (Default is "Narrow").

© N9EWO 2017

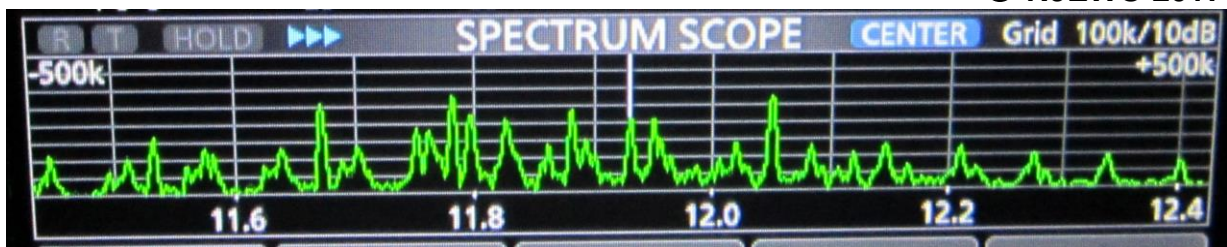

Improved "Spectrum Scope" settings for the ICOM IC-7300. Waterfall not selected in standard screen due to the limited space available (much more useful in EXPD Screen, "Small" Size). Adjusting the "Center Type Display" to "Carrier Point Center (ABS Freq)", will give for proper "centered" showing of AM signals on the scope and will also show frequency on the bottom scale in "center" mode which is a very desirable setting.

\* - This will allow for the largest viewable "Spectrum Scope" (when in "Expand Screen")

July 2017 Ver. 4.0 © N9EWO All Rights Reserved